

INSTRUCTIONS

Q:CO-STD/152

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: C-S-N-NE 1/256 Corner; Sec. 12 T. 32N. R. 34W. P.M.M. Lincoln County

1982 Record:
(Hill, 5612S)

At the determined corner position, we set a 5/8 ins. aluminum rod to hard pan with aluminum cap and collar of stone from which:

A Ponderosa pine, 10 ins. dia., bears S86°E, 14.4 ft., marked "1/256 S12 BT"
A D. fir, 12 ins. dia., bears S27°W, 16.6 ft., marked "X BT"

2010 Found:

We find a 3-1/4 ins. dia. aluminum cap, set flush with ground, marked as shown below from which:

A pine stump, 13 ins. dia., bears S84°E, 14.4 ft., with no visible scribing or heel blaze.
A fir stump, 14 ins. dia., bears S23°W, 16.6 ft., with an overgrown heel blaze.

2010 Perpetuation:


Establish new bearing tree as follows:

A Ponderosa pine, 18 ins. dia., bears S67°W, 20.8 ft., scribed "1/256 S12 RM"
A Ponderosa pine, 18 ins. dia., bears N50°W, 2.8 ft., scribed "1/256 S12 RM"

Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.

Metal spike driven into BT's side center at point of measurement

Set a galvanized steel post set East, 2.8 ft from the monument with LSM and USFS boundary decals.

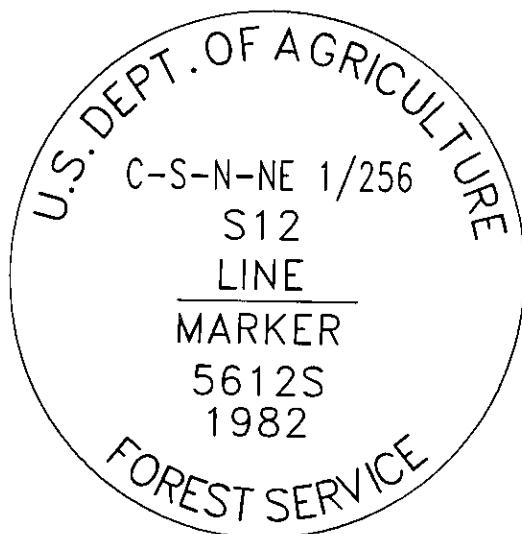

SKETCH OF CORNER

CERTIFICATION

I, Travis R. Williams
certify the information shown herein is true and correct

Travis R. Williams
Signature Ground Party Chief

I, Ken E Jenkins
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101 et seq., M.C.A.)

Ken E Jenkins
Signature of Surveyor & Seal

Date: 12/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

P.O. Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Office of Clerk and Recorder, County of _____

record" was filed for record o
was noted on the cross-index

book No. _____

231821 BOOK: CCR CC&R'S PAGE: 11790 Pages: 1

STATE OF MONTANA LINCOLN COUNTY

RECORDED: 03/30/2011 11:40 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER


FEE: \$0.00

BY: _____

TO: MONTANA NORTHWEST COMPANY, P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 12



Cross Index No. EF-24 T. 32N R. 34W PMM

● - Corner this sheet