

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: C-N-SW-NE 1/256 Corner; Sec. 12 T. 32N. R. 34W. P.M.M. Lincoln County

1982 Record:
(Hill, 5612S)

At the determined corner position, set a 2-1/2 ins. x 30 ins. aluminum pipe, approximately 22 ins. in the ground from which:

- A D. fir, 5 ins. dia., bears N48°E, 21.5 ft., marked "X BT"
- A D. fir, 6 ins. dia., bears S58°W, 29.9 ft., marked "S12 1/256 BT"

2010 Found:

We find a 3-1/4 ins. dia. aluminum cap, set loosely, rising 1.3ft above large rock mound, marked as shown below from which:

- A fir, 9 ins. dia., bears N46°E, 21.5 ft., with an overgrown heel blaze.
- A fallen fir, 6 ins. dia., bears S58°W, 29.8 ft., with an overgrown heel blaze.

2010 Perpetuation: Establish new bearing tree as follows:


A Fir, 15 ins. dia., bears East, 21.4 ft., scribed "1/256 S12 RM".

Add to and stabilize rock mound around monument.

Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.

Metal spike driven into BT's side center at point of measurement

Set a galvanized steel post North, 3.2 ft from the monument with LSM and USFS boundary decals.

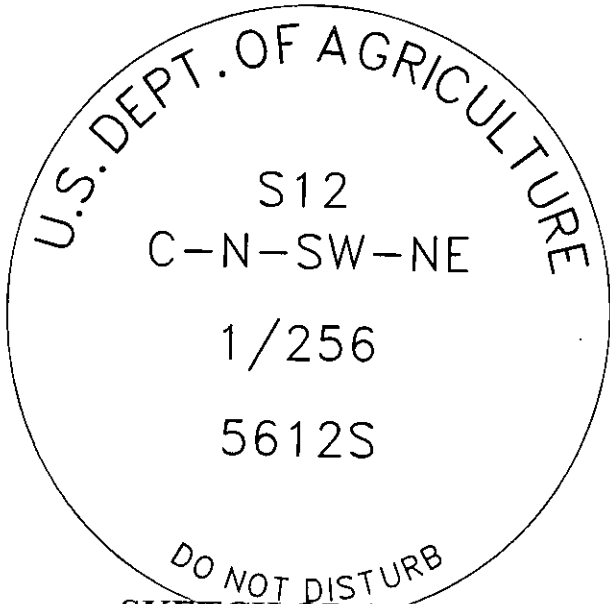	<p style="text-align: center;">CERTIFICATION</p> <p>I, <u>Travis R. Williams</u> certify the information shown herein is true and correct.</p> <p style="text-align: center;">_____ Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, M.C.A.)</p> <p style="text-align: center;">_____ Signature of Surveyor & Seal</p> <p>Date: <u>12/2010</u> Reg. No. <u>9330 LS</u></p> <p>Employer: <u>Montana Northwest Company</u> <u>P.O. Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No. 1617-10</u></p>
---	---


Office of Clerk and Recorder, County of

record" was filed for record
was noted on the cross-index
book No. _____

231822 BOOK: CCR CC&R'S PAGE: 11791 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 03/30/2011 11:41 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: [Signature]
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 12



Cross Index No. FG-23.5 T. 32N R. 34W PMM

- Corner this sheet