

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: W-W 1/64 Corner; Secs. 12&13 T. 32N. R. 34W. P.M.M. Lincoln County

1975 Record:
(Shaw, 2343S)

Certificate of Survey No. 195 by J.T. Shaw, Montana Reg. No. 2343-S
Set a 1-1/2 inch by 30 inch long brass capped pipe, 24 inches in the ground from which:
A Ponderosa pine, 8 ins. dia., bears N45°E, 24.7 ft., scribed "RM1"
A Douglas fir, 8 ins. dia., bears N40°W, 29.6 ft., scribed "RM2"
Corner Recordation Form (Book 1, Page 448) and COS No. 195 are both on record at the Lincoln County Courthouse.

2009 Record:
(Davis, 4975S)

During field search of the area, found a very loosely set 1-1/2 inch dia. iron pipe with a 2-1/2 inch dia. brass cap, protruding 18 inches above ground per COS No. 195 from which:
A Ponderosa pine, 6 ins. dia., bears N45°E, 24.7 ft., with an overgrown face.
A Douglas fir, 12 ins. dia., bears N41°W, 29.6 ft., with an overgrown face.
The W-W 1/64 cor. was set by computed location from a sec. breakdown by Davis Surveying during the month of April 1994, which is on record at the Lincoln County Courthouse. At the computed location which bears S74°45'10"E, 1.21 feet from the Shaw Monument, set a 3-1/4 inch dia. alum. cap on a 5/8 inch dia. alum. rod, 26 inches in the ground from which:
A Douglas fir, 5.25 ins. dia., bears S32°E, 2.7 ft., scribed "W-W1/64S13BT"
A Ponderosa pine, 6 ins. dia., bears N45°E, 23.6 ft., scribed "W-W1/64S12BT"

2010 Found:


We find a 2-1/2 inch brass cap, rising 1.3 feet above the ground on a 2 inch steel pipe marked as shown below. This appears to be the cap set by (Shaw, 2343S). No evidence is found of a 3-1/4 inch alum. cap being set by (Davis, 4975S) as mentioned above. All accessories hereafter will be referenced to the found brass cap.

A Ponderosa pine, 6 ins. dia., bears N48°30'E, 24.3 ft., with an illegible heel blaze.
A Douglas fir, 6 ins. dia., bears S42°E, 4.2 ft., with an illegible heel blaze.
A Douglas fir, 12 ins. dia., bears N37°E, 25.5 ft., with an illegible heel blaze.

2010 Perpetuation:

Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.

Existing galvanized steel post repositioned to North, 0.35 ft of the monument with LSM and USFS boundary decals.

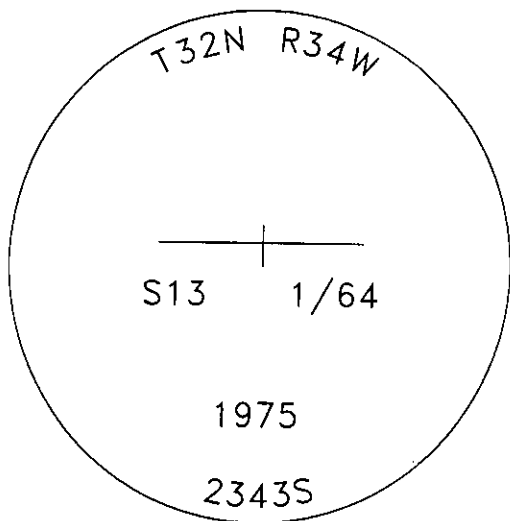

SKETCH OF CORNER

CERTIFICATION

I, Keith Brandt
certify the information shown herein is true and correct.

Keith Brandt
Signature Ground Party Chief

I, Ken E Jenkins
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act" (70-22-101, M.C.A.)

Ken E Jenkins
Signature of Surveyor & Seal

Date: 12/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

P.O. Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10


Office of Clerk and Recorder: 231823 BOOK: CCR CC&R'S PAGE: 11792 Pages: 1

record" was filed for record STATE OF MONTANA LINCOLN COUNTY
RECORDED: 03/30/2011 11:42 KOI: CC&R'S
was noted on the cross-index TAMMY D. LAUER CLERK AND RECORDER

book No. FEE: \$0.00 BY: Heather Lauer
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 12

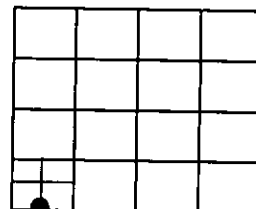

Cross Index No. J-21.5 T. 32N R. 34W PMM

- Corner this sheet