

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: NE 1/16 Corner; Sec. 14 T.32N. R. 34W. P.M.M. Lincoln County

1975 Record:
(Shaw, 2343S)

Set a 1-1/2 ins. x 30 ins. brass capped pipe, 24 ins. in the ground from which:

- A Ponderosa pine, 22 ins. dia., bears N74°E, 15.35 ft., scribed "RM1"
- A Douglas fir, 12 ins. dia., bears S20°E, 19.05 ft., scribed "RM2"

2010 Found:

We find a 2-1/2 ins. dia. brass cap on 1-1/2 ins. dia. metal pipe set firm, marked as shown below from which:


- A Ponderosa pine, 23 ins. dia., bears N75°E, 15.3 ft., with an overgrown heel blaze.
- A fir, 17 ins. dia., bears S20°E, 19.0 ft., with an overgrown heel blaze.

2010 Perpetuation:

Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.

Metal spike driven into BT's side center at point of measurement.

Set a galvanized steel post West, 1.8 ft from the monument with LSM and USFS boundary decals.

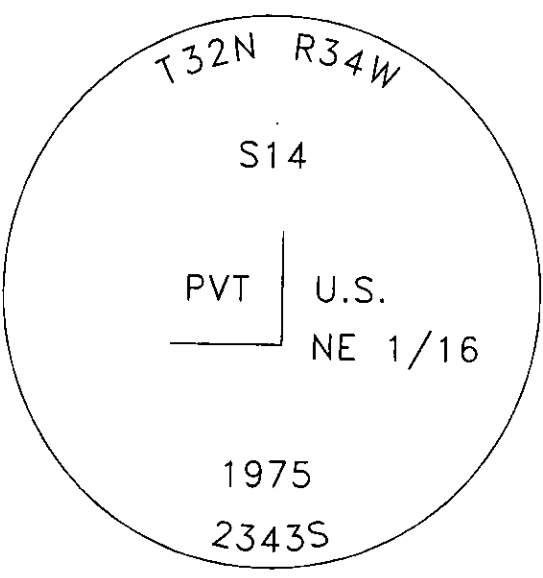
 <p>SKETCH OF CORNER</p>	<p style="text-align: center;">CERTIFICATION</p> <p>I, <u>Travis R. Williams</u> certify the information shown herein is true and correct.</p> <p style="text-align: center;"><i>Travis R. Williams</i> _____ Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)</p> <p style="text-align: center;"><i>Ken E Jenkins</i> _____ Signature of Surveyor & Seal</p> <p>Date: <u>12/2010</u> Reg. No. <u>9330LS</u></p> <p>Employer: <u>Montana Northwest Company</u> <u>P.O. Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No. 1617-10</u></p>
--	--

Office of Clerk and Recorder, County of _____ This "corner record" was filed for record

was noted on the cross-index: 231829 BOOK: CCR CC&R'S PAGE: 11798 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 03/30/2011 11:47 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER

book No. _____ FEE: \$0.00 BY: *Heather D. Davis*
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA
County Official

Sec. 14



Cross Index No. K-20 T. 32N R. 34W PMM

● - Corner this sheet