

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: C-E-W-E 1/256 Corner; Sec. 14 T. 32N. R. 34W. P.M.M. Lincoln County

1976 Record:
(Shaw, 2343S)

Set a 1-1/2 ins. x 30 ins. brass capped pipe, 24 ins. in the ground from which:

A Hemlock, 12 ins. dia., bears N56°E, 34.8 ft., scribed "RM1"
A Grand fir, 12 ins. dia., bears S32°E, 15.2 ft., scribed "RM2"

2010 Found:

We find a 2-1/2 ins. dia. brass cap on 1-1/2 ins. dia. metal pipe set firm, marked as shown below from which:

A Hemlock, 17 ins. dia., bears N58°E, 34.8 ft., scribed "RM1"
A Grand fir, 19 ins. dia., bears S34°E, 15.1 ft., with visible scribing in a partially overgrown heel blaze.


2010 Perpetuation:

Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.

Metal spike driven into BT's side center at point of measurement.

Set a galvanized steel post S27°W, 0.8 ft from the monument with LSM and USFS boundary decals.


NOTE: Markings on cap differ from that of record.

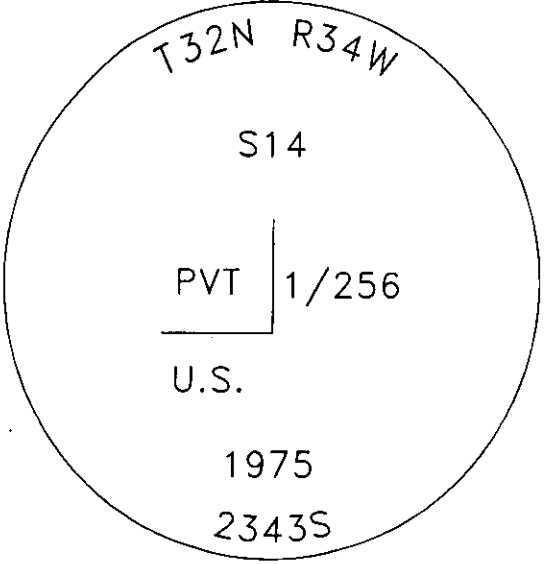 <p>SKETCH OF CORNER</p>	<p style="text-align: center;">CERTIFICATION</p> <p>I, <u>Travis R. Williams</u> certify the information shown herein is true and correct.</p> <p style="text-align: center;">_____ Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)</p> <p style="text-align: center;">_____ Signature of Surveyor & Seal</p> <p>Date: <u>12/2010</u> Reg. No. <u>9330 LS</u> Employer: <u>Montana Northwest Company</u> <u>P.O. Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No. 1617-10</u></p>
--	---

Office of Clerk and Recorder, County of _____ This "corner
record" was filed for record c 231832 BOOK: CCR CC&R'S PAGE: 11801 Pages: 1
was noted on the cross-index STATE OF MONTANA LINCOLN COUNTY
book No. _____ RECORDED: 03/30/2011 11:50 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: Joanne D. Lauer Deputy
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Cross Index No. L-19.75 T. 32N R. 34W PMM



- Corner this sheet