

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: CN-1/16 Corner; Sec. 14 T.32N. R. 34W. P.M.M. Lincoln County

1976 Record:
(Shaw, 2343S)

Set a 1-1/2 ins. x 30 ins. brass capped pipe, 24 ins. in the ground from which:

- A Douglas fir, 18 ins. dia., bears N50°E, 20.0 ft., scribed "RM1"
- A Douglas fir, 12 ins. dia., bears S57°E, 24.2 ft., scribed "RM2"

2010 Found:

Found a 2-1/2 ins. dia. brass cap on 1-1/2 ins. dia. metal pipe set firm, marked as shown below from which:

An uprooted fir stump, 19 ins. dia., bears N50°E, 20.2 ft., with an overgrown heel blaze. Dimensions taken to a stump cavity in ground.

A fir stump, 14 ins. dia., bears S58°E, 23.5 ft., with no visible markings.


2010 Perpetuation: Establish new bearing trees as follows:

- A fir, 7 ins. dia., bears N40°E, 9.4 ft., scribed "CN 1/16 S14 RM1"
- A fir, 10 ins. dia., bears N28°W, 16.2 ft., marked "CN 1/16 S14 RM2"

Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.

Metal spike driven into BT's side center at point of measurement.


Set a galvanized steel post East, 2.0 ft from the monument with LSM and USFS boundary decals.

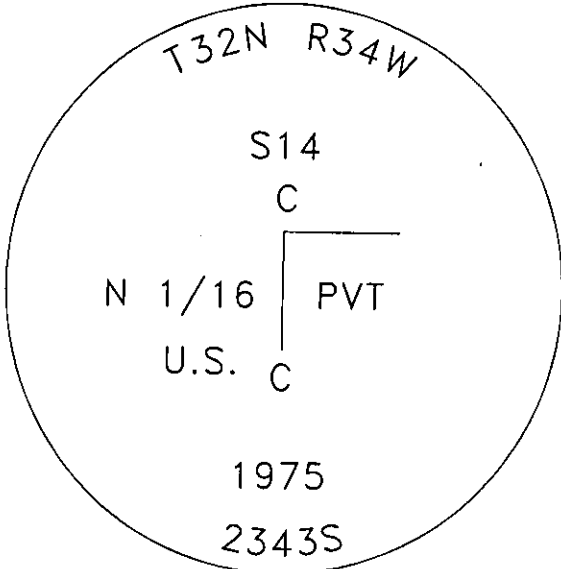 <p style="text-align: center;">SKETCH OF CORNER</p>	<p style="text-align: center;">CERTIFICATION</p> <p>I, <u>Travis R. Williams</u> certify the information shown herein is true and correct.</p> <p style="text-align: center;"><i>Travis R. Williams</i> Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)</p> <p style="text-align: center;"><i>Ken E Jenkins</i> Signature of Surveyor & Seal</p> <p>Date: <u>12/2010</u> Reg. No. <u>9330 LS</u> Employer: <u>Montana Northwest Company</u> <u>P.O. Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No.1617-10</u></p>
--	---

Office of Clerk and Recorder, County of _____ This "corner
record" was filed for record 231833 BOOK: CCR CC&R'S PAGE: 11802 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
was noted on the cross-index RECORDED: 03/30/2011 11:51 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
book No. _____ FEE: \$0.00 BY: *Tammy D. Lauer*
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 14



Cross Index No. K-19 T. 32N R. 34W PMM

● - Corner this sheet