

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**Corner: Center 1/4 Corner, Section 18 T. 32N. R. 34W. P.M.M. Lincoln County1968 BLM Record:  
(Ninneman)

Set std. brass cap at intersection of north-south and east-west centerline.

From which:

Pine, 12 ins. dia., bears N72°W, 24.4 ft., mkd center w/ chain saw

Pine, 10 ins. dia., bears S09°30' W, 34.0 ft., mkd center w/ chain saw

1982 Record:  
(Hill 5612 S)

Found brass cap and 2 bearing trees as per the Ninneman survey (Book 1, Page 115) which we determined through our section breakdown to be out of position.

We determined a position for the center 1/4 of Section 18 from which the Ninneman monument bears N26°48'56"W, 61.4 ft.

At the determined position, set a 2-1/2 ins. dia. x 30 ins. alum. pipe, 22 ins. in the ground with a collar of stone. From which:

Douglas Fir, 6 ins. dia., bears N26°W, 20.3 ft., mkd "C1/4 BT"

Douglas fir, 14 ins. dia., bears S25°W, 12.2 ft., mkd "X BT"

Fir, 10 ins. dia., bears S38°W, 0.8 ft., attached location poster

2010 Found:

We find a 3-1/4 ins. dia. alum. cap, as shown below, on 2-1/2" dia. alum. pipe, rising 0.4 ft. from the ground, from which:

Douglas Fir, 8 ins. dia., bears N29°W, 21.0 ft., scribing visible on blaze

NOTE: Record bearing and distance differs from found.

Douglas fir, dead fall, 15 ins. dia., bears S25°W, 12.2 ft., scribing visible "X B"

We also find the brass cap set by the 1968 Ninneman survey. This brass cap bears N25°W, 61.6 ft., from the alum. cap set by the 1982 survey. From which:

Lodge Pole Pine, 12 ins. dia., bears N73°W, 24.4 ft., scribing visible "CEN"

Lodge Pole Pine stump, 10 ins. dia., bears S11°W, 34.1 ft., visible scribing.

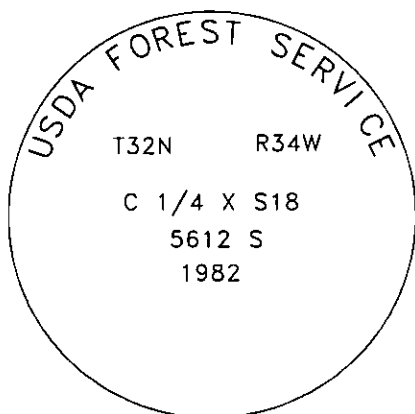
2010 Perpetuation:

We establish new reference monuments for 1982 Hill monument as follows:

Douglas Fir, 8 ins. dia., bears S1°E, 49.9 ft., scribed "T32N R34W S18 X BT"

We set galvanized steel posts, West, 1.5 ft. and South, 2.1 ft. from the monument w/ LSM and USFS boundary decals.

Bearing trees were affixed with BT tags, snow blazed and a painted red band.

**SKETCH OF CORNER****CERTIFICATION**I, Keith Brandt

certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Ken E Jenkins

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor &amp; Seal

Date: 9/2010 Reg. No. 9330 LSEmployer: Montana Northwest CompanyPO Box 8777, Missoula, MT 59807406-721-4033 Project No. 1617-10**Sec. 18**

Office of Clerk and Recorder, County of \_\_\_\_\_

This "corner

record" was filed for record o

was noted on the cross-index

book No. \_\_\_\_\_

231838 BOOK: CCR CC&amp;R'S PAGE: 11807 Pages: 1

STATE OF MONTANA LINCOLN COUNTY

RECORDED: 03/30/2011 11:56 KOI: CC&amp;R'S

TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00

BY: Francis Dennis Deputy

TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

