

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**Corner: N 1/16 Corner; Secs 20 & 21 T. 32N. R. 34W. P.M.M. Lincoln County

1982 Record: No previous record on file. No evidence found on the ground.  
(Hill 5612S) Set a 5/8 ins. dia. x 24 ins. alum. rod, w/ alum. cap, 20 ins. in the ground, w/ a collar of stones.  
From which:  
Douglas Fir, 8 ins. dia., bears S76°E, 19.7 ft., mkd "N 1/16 S21 BT"  
Douglas Fir, 14 ins. dia., bears N56°W, 8.0 ft., mkd "N1/16 S20 BT"

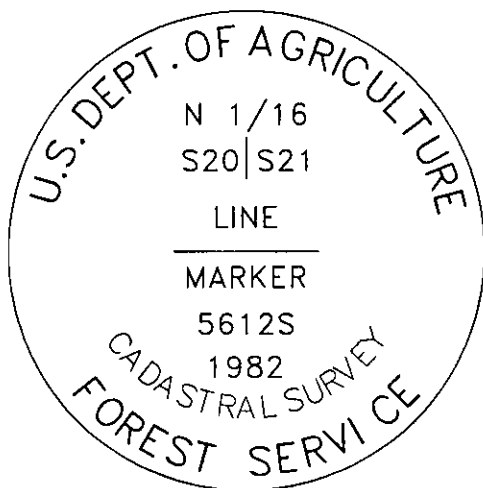
2010 Found: We find 3-1/4 ins. dia. alum. cap, marked as shown below, on 5/8 ins. dia. alum. rod, set flush w/ a ring of stone.  
From which:  
Douglas Fir snag, 14 ins. dia., bears N56°W, 8.1 ft., w/ BT tag  
Fragments of stump & hole, bear S76°E, 19.7 ft. no visible scribing

2010 Perpetuation: We establish new reference monuments as follows:

Ponderosa Pine, 20 ins. dia., bears S80°E, 72.8 ft., scribed "N1/16 S21 BT"  
Douglas Fir, 13 ins. dia., bears N54°W, 39.4 ft., scribed "N1/16 S20 BT"

We set galvanized steel posts, North, 1.25 ft. and West, 0.7 ft. from the monument w/ LSM and USFS boundary decals.

Bearing trees were affixed with BT tags, snow blazed, and a painted red band.

**SKETCH OF CORNER****CERTIFICATION**

I, Keith Brandt  
certify the information shown herein is true and correct.

Keith Brandt  
Signature Ground Party Chief

I, Ken E Jenkins  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, M.C.A.)

Ken E Jenkins  
Signature of Surveyor & Seal

Date: 9/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Sec. 20

Office of Clerk and Recorder, County of \_\_\_\_\_ This "corner  
record" was filed for record on 231869 BOOK: CCR CCR'S PAGE: 11812 Pages: 1  
was noted on the cross-index plat STATE OF MONTANA LINCOLN COUNTY  
book No. \_\_\_\_\_ RECORDED: 03/31/2011 9:47 KOI: CCR'S  
TAMMY D. LAUER CLERK AND RECORDER  
FEE: \$0.00 BY: Garnie Lauer  
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Cross Index No. 09 T. 32N R. 34W PMM

● - Corner this sheet

