

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner: Sec. Corner Secs 30, 31, 25 & 36 T. 32N. R. 33 & 34 W. P.M.M. Lincoln County1981 Record:  
(Nineman 4661S)Original Evidence not available  
Found a std. BLM brass capped monument.  
From which:

Fir, 10 ins. dia., bears N17°E, 18.5 ft., w/ overgrown scribing  
Fir, 9 ins. dia., bears S29-1/2°E, 26.4 ft., w/ overgrown scribing  
Fir, 8 ins. dia., bears S51-3/4°W, 48.2 ft., scribed "T32N R34W S36 BT"  
Fir, 8 ins. dia., bears N5°W, 43.6 ft., scribed "T32N R34W S25 BT"  
NOTE: All BT's posted by ART in 1968

2010 Found:


We find a 3-1/4 ins. dia. BLM brass cap on 2-1/2" dia. steel pipe, marked as shown below, rising 0.4 ft. from a collar of stone. Monument is solid but leans heavily to north.  
From which:

Douglas Fir, 11 ins. dia., bears N19°E, 17.4 ft., w/ overgrown blaze  
BT tag JRS 6-06  
Douglas Fir, 12 ins. dia., bears S26°E, 27.4 ft., w/ overgrown blaze  
BT tag JRS 6-06  
Douglas Fir, 9 ins. dia., bears S15°W, 48.7 ft., w/ overgrown blaze  
BT tag JRS 6-06  
Douglas Fir, 7-1/2 ins. dia., bears N36°W, 26.8 ft., scribed "T32N R34W S25 BT", BT tag ART 1968  
Fir snag, 10 ins. dia., bears N5°30'W, 43.6ft., w/ BT tag ART 1968

2010 Perpetuation: We establish no new reference monuments.

We set a galvanized steel post, South, 1.6 ft. from the monument w/ LSM and USFS boundary decals.

Bearing trees were affixed with BT tags and a painted red band.

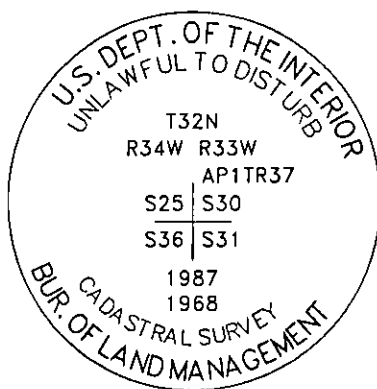

## SKETCH OF CORNER

## CERTIFICATION

I, Keith Brandt  
certify the information shown herein is true and correct.Keith Brandt  
Signature Ground Party ChiefI, Ken E Jenkins  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Montana Recordation Act" (70-22-101 et seq., M.C.A.)Ken E Jenkins  
Signature of Surveyor & SealDate: 12/2010 Reg. No. 9330 LSEmployer: Montana Northwest CompanyPO Box 8777, Missoula, MT 59807406-721-4033 Project No. 1617-10

Sec. 25

Office of Clerk and Recorder, County of \_\_\_\_\_ This "corner

record" was filed for record on \_\_\_\_\_

was noted on the cross-index plat \_\_\_\_\_

book No. \_\_\_\_\_

231870 BOOK: CCR CC&R'S PAGE: 11813 Pages: 1  
STATE OF MONTANA LINCOLN COUNTY  
RECORDED: 03/31/2011 9:48 KOI: CC&R'S  
TAMMY D. LAUER CLERK AND RECORDER  
FEE: \$0.00 BY: Deanna Lauer  
TO: MONTANA NORTHWEST COMPANY

County Official

Cross Index No. V 25 T. 32N R. 34W PMM

● - Corner this sheet