

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**Corner: C-S-N 1/64 Corner: Section 12 T. 32N. R. 34W. P.M.M. Lincoln County1982 Record:  
(Hill 5612S)

No previous record of monumentation on file. No evidence found on the ground.

At the determined corner position, set an alum.cap on a 5/8 ins. dia. alum. rod, to hard pan, w/ a raised a collar of stone.  
From which:Douglas Fir, 16 ins. dia., bears S79°W, 25.2 ft., mkd "1/64 S12 BT"  
Douglas Fir, 16 ins. dia., bears N72°E, 10.3 ft., mkd "X BT"

2010 Found:

We find a 3-1/4 ins. dia. alum. cap, marked as shown below, loosely set on an alum. rod, flush w/ the ground

From which:

Douglas Fir, 17 ins. dia., bears S79°W, 25.2 ft., w/ overgrown blaze & BTtag  
Stump hole, bears N72°E, 10.3 ft.  
Blown down fir, 18 ins. dia., bears S44°30'E, 30 ft.+/-, has been uprooted from stump hole and rolled down hill.

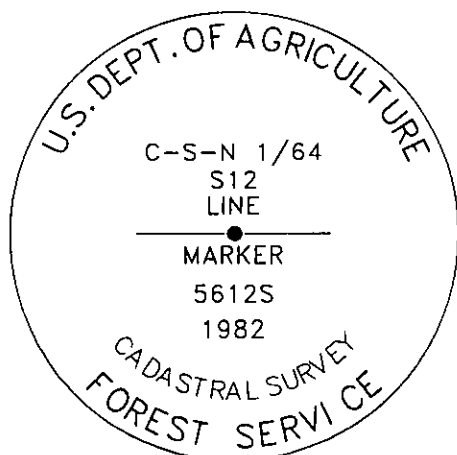
2010 Perpetuation:

We establish new reference monument as follows:

Douglas Fir, 5 ins. dia., bears N50°W, 24.3 ft., scribed "C-S-N-1/64 S12 BT"

We set a galvanized steel post, North, 0.8 ft. from the monument, w/ LSM, USFS and property boundary decals.

Bearing trees were affixed with BT tags, snow blazed and a painted red band.

**SKETCH OF CORNER****CERTIFICATION**I, Keith Brandt  
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Ken E Jenkins  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor &amp; Seal

Date: 12/2010 Reg. No. 9330 LSEmployer: Montana Northwest Company

PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Sec. 12

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 231871 BOOK: CCR CC&R'S PAGE: 11814 Pages: 1 STATE OF MONTANA LINCOLN COUNTY was noted on the cross-index of RECORDED: 03/31/2011 9:49 KOI: CC&R'S book No. TAMMY D. LAUER CLERK AND RECORDER FEE: \$0.00 BY Ken E Jenkins TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

