

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: C-N-NE 1/64 Corner: Sec. 12 T. 32N. R. 34W. P.M.M. Lincoln County

1982 Record:
(Hill, 5612S)

At the determined corner position, set a 5/8 ins. aluminum rod to hard pan, with aluminum cap and collar of stone from which:

- A D. fir, 7 ins. dia., bears S44°E, 9.2 ft., marked "X BT"
- A D. fir, 4 ins. dia., bears S38°W, 13.8 ft., marked "C-N-NE 1/64"

2010 Found:

We find a 3-1/4 ins. dia. aluminum cap set flush with ground, marked as shown below from which:

- A fir, 11 ins. dia., bears S42°E, 9.2 ft., with an overgrown heel blaze.
- A fir, 4.5 ins. dia., bears S38°W, 13.8 ft., with visible scribing in a partially overgrown heel blaze.

2010 Perpetuation:


Establish new bearing tree as follows:

- A Ponderosa pine, 32 ins. dia., bears N17°E, 9.0 ft., scribed "1/64 S12 RM".

Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.

Metal spike driven into BT's side center at point of measurement

Set a galvanized steel post North, 1.0 ft. of the monument, with LSM and USFS boundary decals.

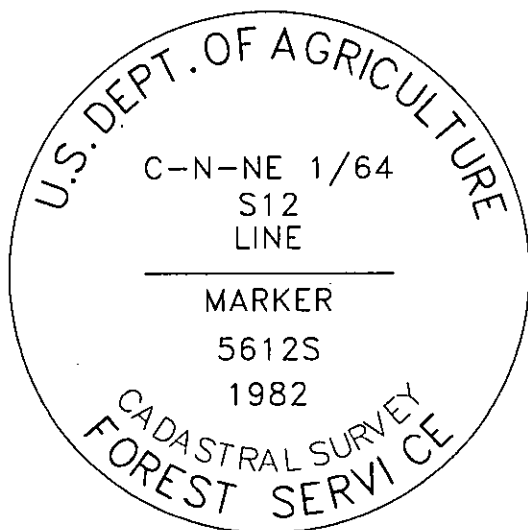

SKETCH OF CORNER

CERTIFICATION

I, Travis R. Williams
certify the information shown herein is true and correct.

Travis R. Williams
Signature Ground Party Chief

I, Ken E Jenkins
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Montana Corner Recordation Act" (70-22-101, M.C.A.)

Ken E Jenkins
Signature of Surveyor & Seal

Date: 12/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company


P.O. Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Sec. 12

Office of Clerk and Recorder, County of _____ This "corner record" was filed for record 231872 BOOK: CCR CC&R'S PAGE: 11815 Pages: 1
was noted on the cross-index STATE OF MONTANA LINCOLN COUNTY
book No. _____ RECORDED: 03/31/2011 9:50 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: Tammy D. Lauer
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official



Cross Index No. EF-24 T. 32N R. 34W PMM

● - Corner this sheet