

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: SW SW 1/64 Corner, Section 12 T. 32N. R. 34W. P.M.M. Lincoln County

Record: Certificate of Survey 1287
(Ninneman 4461S)

1994 Record: During a field search of the area, found a 5/8 ins. dia. steel rebar w/ 1-1/4 ins. dia. yellow
(Davis 4975S) PVC cap, stamped "JHN 4461S" per COS No. 1287. No bearing trees were established for the monument.

At the computed section breakdown location, which bears N87°56'39"E, 0.42 ft. from the Ninneman monument, set a 3-1/4 ins. dia. alum. cap on a 5/8 ins. dia. alum. rod, 26 ins. in the ground.

From which:

Douglas Fir, 10-3/4 ins. dia., bears S42°W, 17.0 ft., scribed
"SW-SW 1/64 S12 BT"

Douglas Fir, 4-3/4 ins. dia., bears N85°E, 21.9 ft., scribed
"SW-SW 1/64 S12 BT"

Set a galvanized steel post, East, 5.0 ft. of the monument w/ LSM, USFS and property boundary decals.

2010 Found: We find a 3-1/4 ins. dia. alum. cap, marked as shown below, on an alum. rod, rising 0.2 ft. from the ground.

From which:

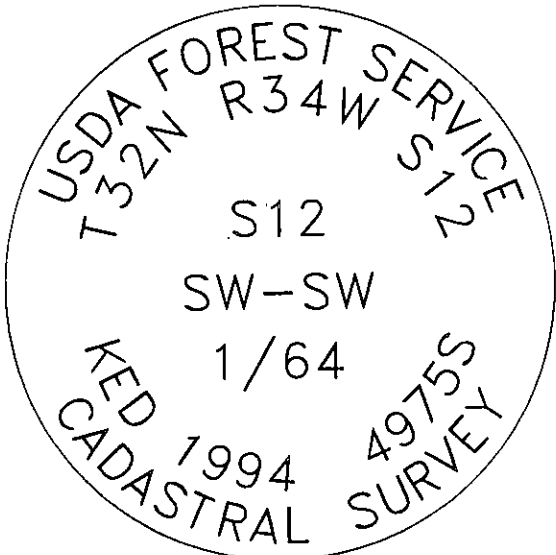
Douglas Fir, 8 ins. dia., bears N86°30'E, 21.9 ft., w/ partially visible scribing
"W S W"

Douglas Fir, 12 ins. dia., bears S44°W, 17.0 ft., w/ partially visible scribing
"S W W 1/64"

Galvanized steel post, bears East, 7.0 ft. w/ LSM, USFS and property boundary decals.

5/8 ins. dia. rebar, bears N84°30'W, 0.5 ft.

2010 Perpetuation: We establish no new reference monuments.
Bearing trees were painted with a red band.

 <p>SKETCH OF CORNER</p>	<p style="text-align: center;">CERTIFICATION</p> <p>I, <u>Keith Brandt</u> certify the information shown herein is true and correct. <i>Keith Brandt</i> _____ Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Montana Corner Recordation Act" (70-22-101, JENKINS C.A.) <i>Ken E Jenkins</i> _____ Signature of Surveyor & Seal</p> <p>Date: <u>12/2010</u> Reg. No. <u>9330 LS</u> Employer: <u>Montana Northwest Company</u> <u>PO Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No. 1617-10</u></p>
--	--

Sec. 12

Office of Clerk and Recorder, County of _____ This "corner record" was filed for reco. 231873 BOOK: CCR CCR'S PAGE: 11816 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
was noted on the cross-in RECORDED: 03/31/2011 9:51 KOI: CCR'S
TAMMY D. LAUER CLERK AND RECORDER
book No. FEE: \$0.00 BY: *Deanna Davis Deputy*
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

