

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: C-S-SW 1/64 Corner; Section 12 T. 32N. R. 34W. P.M.M. Lincoln County

Record: Certificate of Survey 1287
(Ninneman 4461S)

1994 Record: During a field search of the area, found a 5/8 ins. dia. steel rebar w/ 1-1/4 ins. dia. yellow
(Davis 4975S) PVC cap, stamped "JHN 4461S" per COS No. 1287. No bearing trees were established for the monument.

At the computed section breakdown location, which bears N76°54'04"E, 0.91 ft. from the Ninneman monument, set a 3-1/4 ins. dia. alum. cap on a 5/8 ins. dia. alum. rod, 26 ins. in the ground.

From which:

Douglas Fir, 9 ins. dia., bears S51°W, 7.8 ft., scribed "C-S-SW 1/64 S12 BT"
Douglas Fir, 5 ins. dia., bears N40°W, 13.5 ft., scribed "C-S-SW 1/64 S12 BT"


Set a galvanized steel post, North, 2.0 ft. of the monument w/ LSM, USFS and property boundary decals.

2010 Found: We find a 3-1/4 ins. dia. alum. cap, marked as shown below, on an alum. rod, rising 0.2 ft. from the ground.
From which:

Douglas Fir, 11 ins. dia., bears S51°W, 7.8 ft., w/ overgrown blaze & BT tag
Douglas Fir, 6 ins. dia., bears N40°W, 13.5 ft., w/ overgrown blaze & BT tag
Galvanized steel post, bears North, 1.5 ft.
5/8 ins. dia. rebar, bears S76°W, 1.5 ft.

2010 Perpetuation: We establish no new reference monuments.

Bearing trees were affixed with BT tags and a painted red band.

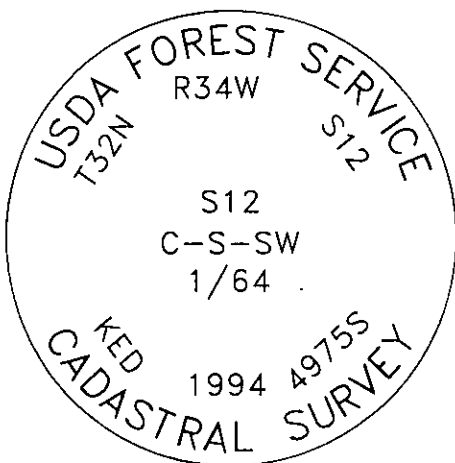

SKETCH OF CORNER

CERTIFICATION

I, Keith Brandt
certify the information shown herein is true and correct.

Keith Brandt
Signature Ground Party Chief

I, Ken E Jenkins
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Montana Recordation Act" (70-22-101, et seq., M.S.A.)

Ken E Jenkins
Signature of Surveyor & Seal

Date: 12/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Sec. 12

Office of Clerk and Recorder, County of _____ This "corner
record" was filed for record o 231874 BOOK: CCR CC&R'S PAGE: 11817 Pages: 1
was noted on the cross-index STATE OF MONTANA LINCOLN COUNTY
book No. TAMMY D. LAUER CLERK AND RECORDER
RECORDED: 03/31/2011 9:52 KOI: CC&R'S
FEE: \$0.00 BY: Heather Lauer Deputy
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

