

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner: SW 1/16 Corner, Section 12 T. 32N. R. 34W. P.M.M. Lincoln County

1994 Record:  
(Davis 4975S)

No other monument set as of record. No evidence found on the ground.

At the computed section breakdown location, set a 3-1/4 ins. dia. alum. cap on a 5/8 ins. dia. alum. rod, 26 ins. in the ground.  
From which:

Douglas Fir, 17 ins. dia., bears N85°E, 12.1 ft., scribed "SW 1/16 S12 BT"  
Douglas Fir, 11 ins. dia., bears S72°30'W, 9.8 ft., scribed "SW 1/16 S12 BT"  
Set a galvanized steel post, South, 2 ft., attached LSM, USFS and property boundary decals.

2010 Found:

We find a 3-1/4 ins. dia. alum. cap, marked as shown below, on alum. rod, rising 0.4 ft. above the ground.  
From which:


Douglas Fir, 17 ins. dia., bears N85°E, 12.1 ft., scribed "SW 1/16 S12 BT"  
Fir blown down, 18-20 ins. dia., bears S72°W, 9.8 ft., scribed "SW 1/16 S12 BT"  
Galvanized steel post, bears South, 2.7 ft.

2010 Perpetuation:

We establish a new reference monument as follows:

Douglas Fir, 17 ins. dia., bears S25°E, 13.8 ft., scribed "SW 1/16 S12 BT"

Bearing trees were affixed with BT tags, snow blazed and a painted red band.

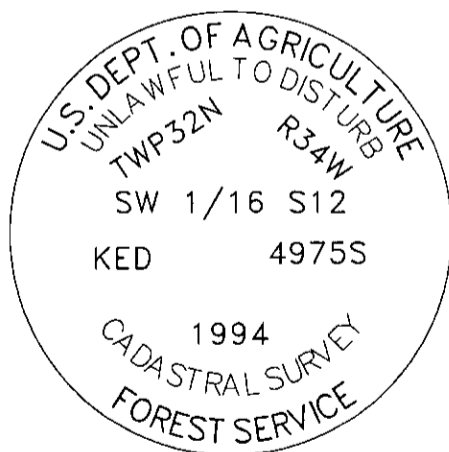

### SKETCH OF CORNER

#### CERTIFICATION

I, Keith Brandt  
certify the information shown herein is true and correct.

Keith Brandt  
Signature Ground Party Chief

I, Ken E Jenkins  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.).

Ken E Jenkins  
Signature of Surveyor & Seal

Date: 12/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Office of Clerk and Recorder, County of \_\_\_\_\_ This "corner

record" was filed for record or

was noted on the cross-index

book No. \_\_\_\_\_

231875 BOOK: CCR CC&R'S PAGE: 11818 Pages: 1

STATE OF MONTANA LINCOLN COUNTY

RECORDED: 03/31/2011 9:53 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00

BY: Ken E Jenkins

TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 12

