

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: C-N-S 1/64 Corner: Section 12 T. 32N. R. 34W. P.M.M. Lincoln County

1994 Record:
(Davis 4975S)

No other monument set as of record. No monuments were found during field search of the area.

At the computed section breakdown location, set a 3-1/4 ins. dia. alum. cap on a 5/8 ins. dia. x 30 ins. alum. rod, 26 ins. in the ground, w/ a raised collar of stone.

From which:

Douglas Fir, 5-1/2 ins. dia., bears S48°W, 20.7 ft., scribed "C-N-S 1/64 S12 BT"

Douglas Fir, 10-3/4 ins. dia., bears S60°30'E, 29.5 ft., scribed
"C-N-S 1/64 S12 BT"

Set a galvanized steel post, East, 3.0 ft., of the monument w/ LSM, USFS
and property boundary decals.

2010 Found:

We find a 3-1/4 ins. dia. alum. cap, marked as shown below, set in a mound of stone.
From which:

Douglas Fir, 13 ins. dia., bears S60°E, 29.5 ft., w/overgrown blaze & BT tag

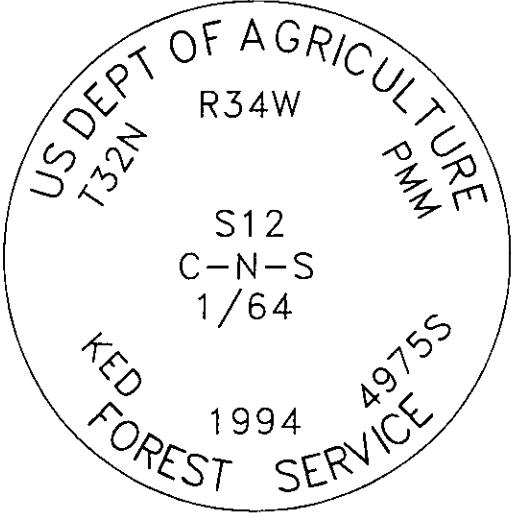
Douglas Fir, 10 ins. dia., bears S48°W, 20.7 ft., w/ overgrown blaze & BT tag

Galvanized steel post, bears East, 2.5 ft.

2010 Perpetuation:

We establish no new reference monuments.

Bearing trees were affixed with BT tags and a painted red band.

 <p>SKETCH OF CORNER</p>	<p style="text-align: center;">CERTIFICATION</p> <p>I, <u>Keith Brandt</u> certify the information shown herein is true and correct. <i>Keith Brandt</i> _____ Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act" (70-22-101, M.C.A.) <i>Ken E Jenkins</i> _____ Signature of Surveyor & Seal</p> <p>Date: <u>12/2010</u> Reg. No. <u>9330 LS</u> Employer: <u>Montana Northwest Company</u> <u>PO Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No. 1617-10</u></p>
--	--

Office of Clerk and Recorder, County of _____ This "corner
record" was filed for record on: 231877 BOOK: CCR CC&R'S PAGE: 11820 Pages: 1
was noted on the cross-index: STATE OF MONTANA LINCOLN COUNTY
book No. _____ RECORDED: 03/31/2011 9:55 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: *Jeanie Nelson*
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA
County Official

Sec. 12

