

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: NW-SE 1/64 Corner; Section 12 T. 32N. R. 34W. P.M.M. Lincoln County1994 Record:
(Davis 4975S)

No other monument set as of record. No monuments were found during field search of the area.

At the computed section breakdown location, set a 3-1/4 ins. dia. alum. cap on a 5/8 ins. dia. x 30 ins. alum. rod, 26 ins. in the ground, w/ a raised collar of stone.

From which:

Douglas Fir, 6-3/4 ins. dia., bears N83°30'E, 20.0 ft., scribed

"NW-SE 1/64 S12 BT"

Grand fir, 16-3/4 ins. dia., bears S07°W, 18.3 ft., scribed

"NW-SE 1/64 S12 BT"

Set a galvanized steel post, West, 2.0 ft., of the monument w/ LSM, USFS and property boundary decals.

2010 Found:

We find a 3-1/4 ins. dia. alum. cap, marked as shown below, on an alum. rod, rising 0.3 ft. from a mound of stone.

From which:

Douglas Fir, 8 ins. dia., bears N83°E, 20.0 ft., partial scribing "NW S1"

Grand fir snag, 17 ins. dia., bears S07°W, 18.3 ft., scribed

"NW-SE 1/64 S12 BT"


Galvanized steel post, bears North, 2.0 ft. (NOTE: Direction differs from record.)

2010 Perpetuation:

We establish a new reference monument as follows:

Douglas Fir, 9 ins. dia., bears N29°E, 20.2 ft., scribed "NW-SE 1/64 S12 BT"

Bearing trees were affixed with BT tags, snow blazed and a painted red band.

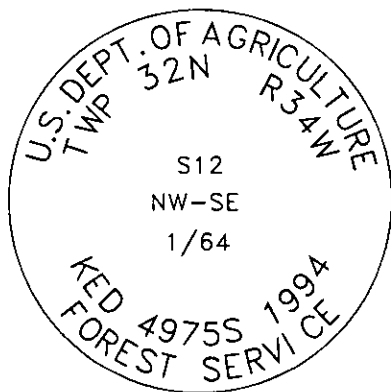

SKETCH OF CORNER

CERTIFICATION

I, Keith Brandt
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Ken E Jenkins
certify that this Corner Record correctly represents work performed by Ken E Jenkins under any direction in compliance with the "Corner Recordation Act" (70-22-101, 93-34, M.C.A.)

Signature of Surveyor & Seal

Date: 12/2010 Reg. No. 9330 LSEmployer: Montana Northwest Company

PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Sec. 12

Office of Clerk and Recorder, County of _____ This "corner

record" was filed for record on

231878 BOOK: CCR CC&R'S PAGE: 11821 Pages: 1

was noted on the cross-index p

STATE OF MONTANA LINCOLN COUNTY

RECORDED: 03/31/2011 9:56 KOI: CC&R'S

book No. _____

TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00

BY: Ken E Jenkins

TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

