

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATIONCorner: C-W-W 1/64 Corner; Section 12 T. 32N. R. 34W. P.M.M. Lincoln County1982 Record:
(Hill 5612S)

No previous record of monumentation on file. No evidence found on the ground.

At the determined corner position, set an alum. rod to refusal, w/ an alum. cap, in a collar of stone.

From which:

Douglas Fir, 12 ins. dia., bears S54°W, 53.4 ft., mkd "1/64 S12 BT"

Douglas Fir, 16 ins. dia., bears S76°E, 32.0 ft., mkd "X BT"

2010 Found:

We find a 3-1/4ins. dia. alum. cap, marked as shown below, on an alum. rod, rising 0.3 ft. from the ground.

From which:

Douglas Fir, 18 ins. dia., bears S54°W, 53.4 ft., w/ overgrown blaze

Blown down fir, 15 ins. dia., bears S76°E, 32.0 ft., w/ BT tag & red paint

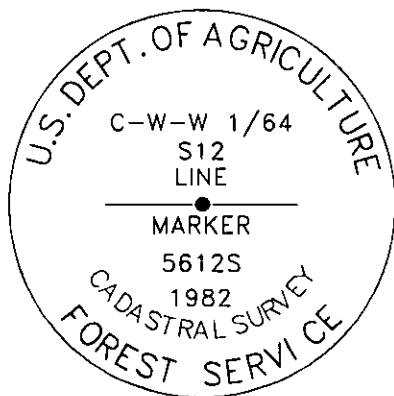
2010 Perpetuation:

We establish new reference monument as follows:

Douglas Fir, 6 ins. dia., bears N72°E, 13.4 ft., scribed "C-W-W 1/64 S12"

We set a galvanized steel post, East, 0.75 ft. from the monument, w/ LSM, USFS and property boundary decals.

Bearing trees were affixed with BT tags, snow blazed and a painted red band.

**SKETCH OF CORNER****CERTIFICATION**I, Keith Brandt
certify the information shown herein is true and correct.Keith Brandt
Signature Ground Party ChiefI, Ken E Jenkins
certify that this Corner Record correctly represents work performed by Ken E Jenkins under my direction in compliance with the Corner Recordation Act" (70-22-101, et seq., M.C.A.)Ken E Jenkins
Signature of Surveyor & SealDate: 12/2010 Reg. No. 9330 LSEmployer: Montana Northwest CompanyPO Box 8777, Missoula, MT 59807406-721-4033 Project No. 1617-10

Sec. 12

Office of Clerk and Recorder, County of _____

This "corner

record" was filed for record on _____

231883 BOOK: CCR CC&R'S PAGE: 11826 Pages: 1

was noted on the cross-index plat _____

STATE OF MONTANA LINCOLN COUNTY

book No. _____

RECORDED: 03/31/2011 10:01 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00

BY: _____

TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

