

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner: C-E-W 1/64 Corner; Section 12 T. 32N. R. 34W. P.M.M. Lincoln County

1982 Record:  
(Hill 5612S)

No previous record of monumentation on file. No evidence found on the ground.

At the determined corner position, set a 2-1/2 ins. dia. alum. pipe, 24 ins. in the ground w/ an alum. cap, in a collar of stone.  
From which:

Hemlock, 8 ins. dia., bears S85°W, 14.4 ft., mkd "1/64 S12 BT"  
Douglas Fir, 10 ins. dia., bears N88°E, 21.3 ft., mkd "X BT"

2010 Found:

We find a 3-1/4 ins. dia. alum. cap, marked as shown below, on a 2-1/2 ins. dia. alum. pipe, rising 0.6 ft. from the ground.  
From which:

Hemlock, 13-1/2 ins. dia., bears S85°W, 14.4 ft., w/ overgrown blaze & BT tag  
Fir snag, 12 ins. dia., bears N88°E, 21.3 ft., w/ partially visible scribing


2010 Perpetuation:

We establish new reference monument as follows:

Douglas Fir, 6 ins. dia., bears N28°W, 32.5 ft., scribed "C-E-W 1/64 S12 BT"

We set a galvanized steel post, North, 1.2 ft. from the monument, w/ LSM, USFS and property boundary decals.

Bearing trees were affixed with BT tags, snow blazed and a painted red band.

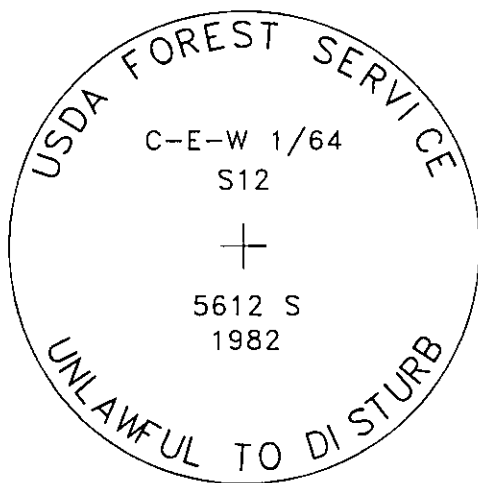

**SKETCH OF CORNER**

### CERTIFICATION

I, Keith Brandt  
certify the information shown herein is true and correct.

Keith Brandt  
Signature Ground Party Chief

I, Ken E Jenkins  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Ken E Jenkins  
Signature of Surveyor & Seal

Date: 12/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Office of Clerk and Recorder, County of \_\_\_\_\_ This "corner record" was filed for record on 231884 BOOK: CCR CC&R'S PAGE: 11827 Pages: 1 STATE OF MONTANA LINCOLN COUNTY was noted on the cross-index ] RECORDED: 03/31/2011 10:02 KOI: CC&R'S book No. \_\_\_\_\_ TAMMY D. LAUER CLERK AND RECORDER FEE: \$0.00 BY: *Leanne Lauer*

TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 12

