INSTRUCTIONS

- 1. Original and/or subsequent record used to evaluate the corner position.
- 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
- 3. Description of monument and accessories set to perpetuate the corner position.
- 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
- 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
- 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: C-N-S-N 1/256 Corner, Section 12 T. 32N. R. 34W. P.M.M. Lincoln County

1982 Record: (Hill 5612S)

No previous record of monumentation on file. No evidence found on the ground.

At the determined corner position, set a 5/8 ins. dia. x 24 ins. alum. rod, w/ 3-1/2 ins. dia. alum. cap, 22 ins. in the ground, w/ a collar of stones.

From which:

Ponderosa Pine, 14 ins. diam., bears N°06W, 15.7 ft., mkd "1/256 BT" Ponderosa Pine, 12 ins. diam., bears S17°W, 18.2 ft., mkd "X BT"

2010 Found:

We find a 3-1/4 ins. dia. alum. cap, marked as shown below, on alum. rod, flush in a loose mound of stone.

From which:

Ponderosa Pine, 18 ins. diam., bears N°06W, 15.7 ft., w/overgrown face blaze

& BT tag

Ponderosa Pine, 14 ins. diam., bears S17°W, 18.2 ft., w/overgrown face blaze

& BT tag


2010 Perpetuation:

We establish no new reference monuments.

We set a galvanized steel post, South, 0.7 ft. from the monument w/ LSM, USFS and property boundary decals.

We reinforced the mound of stones around the monument.

Bearing trees were affixed with BT tags, and a painted red band.

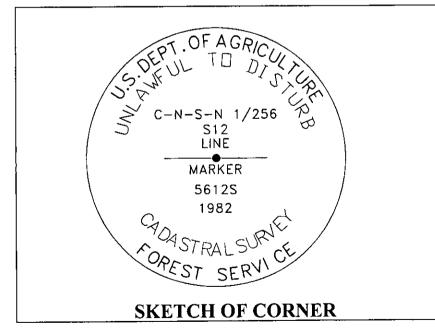

	CERTIFICATION
I, _	Keith Brandt
certi	fy the information shown herein is true and
corr	ect. 1/1 17 1
	Karty Drawlet
:	Signature Ground Party Chief
	A ST A
I, _	Ken E Jenkins
certi	fy that this Corner Record correctly
repr	esents work performed by me or under my
dire	ction in compliance with the Corner E.
Rec	ordation Act" (70-22-101, et sed KMLSA.)
	1/ / / 3330L3
	nen Z frilling
	Signature of Surveyor & Sear () : 500 (C)
	81
Date	e: <u>12/2010</u> Reg. No. <u>9330 L\$C</u>
Emp	oloyer: Montana Northwest Company
	PO Box 8777, Missoula, MT 59807
	406-721-4033 Project No. 1617-10

	Sec. 12
Office of Clerk and Recorder, County of	This "corner
record" was filed for record onSTATE OF MONTANA LING	
was noted on the cross-index plat a recorded: 03/31/2011 TAMMY D. LAUER CLERE	10:04 KOI: CCER'S
hook No FEE: \$0.00 BY	MY P.O. BOX 8777, MISSOULA, ROHTAMA
County Offi	