

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner: 1/4 Corner; Secs. 36&1 T.32N. R. 34W. P.M.M. Lincoln County  
1/4 Corner; Secs. 1&36 T.31N. R. 34W.

1967 BLM Record: Set a 2-1/2 ins. iron pipe, 24 ins. in the ground, with brass cap from which:

A fir, 10 ins. dia., bears S18°W, 65 lks (42.9 ft.)  
 A pine, 20 ins. dia., bears N78°W, 23 lks (15.2 ft.)

1983 Record:  
 (Hill, 5612S)

Found a 2-1/2 ins. BLM pipe, 4 ins. above ground, with brass cap from which:

A pine, 22 ins. dia., bears N77°W, 15.2 ft., with overgrown blaze.  
 A fir, 15 ins. dia., bears S20°W, 43.0 ft., with visible scribing.

2010 Found:

We find a 3-1/4 ins. dia., BLM brass cap, marked as shown below from which:


A pine, 27 ins. dia., bears N77°W, 15.2 ft., with a chopped out heel blaze and no visible scribing.  
 A fir, 16 ins. dia., bears S18°W, 43.0 ft., with an overgrown heel blaze.

2010 Perpetuation:

Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.

Steel spikes driven into BT's, side center at point of measurement.

We set a galvanized steel post West, 1.0 ft from monument, with LSM and USFS boundary decals.

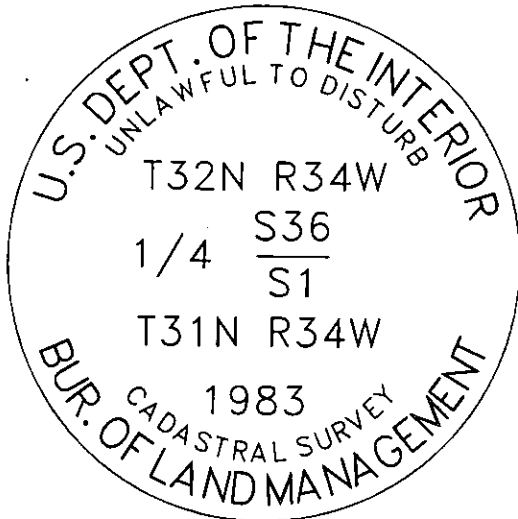

### SKETCH OF CORNER

#### CERTIFICATION

I, Travis R. Williams  
 certify the information shown herein is true and correct

Travis R. Williams  
 Signature Ground Party Chief

I, Ken E Jenkins  
 certify that this Corner Record correctly represents work performed by Ken E Jenkins in my direction in compliance with the Montana Recordation Act" (70-22-101, et seq. M.C.A.)

Ken E Jenkins  
 Signature of Surveyor & Seal

Date: 12/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

P.O. Box 8777, Missoula, MT 59807

406-721-4033 Project No.1617-10

Office of Clerk and Recorder, County of \_\_\_\_\_ This "corner

record" was filed for record 231888 BOOK: CCR CC&R'S PAGE: 11831 Pages: 1

was noted on the cross-index STATE OF MONTANA LINCOLN COUNTY

book No. \_\_\_\_\_ TAMY D. LAUER CLERK AND RECORDER


FEE: \$0.00

BY: Francis Lauer

TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 36



Cross Index No. Z-23 T. 32N R. 34W PMM

● - Corner this sheet