

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATIONCorner: Section Corner, Secs 4, 5, 32 & 33 T. 31 & 32N. R. 34W. P.M.M. Lincoln County

GLO Record: Set limestone and established 4 bearing trees.

1982 Record: Found original stone.
(Staab 5619S) Stump hole, bears N8°15'E, 51 lks (33.7 ft.)
Larch, 20 ins. dia., bears S55°E, 77 lks (50.8 ft.), w/ overgrown scribe
Pine, 12 ins. dia., bears S50°W, 39 lks 25.7 ft.), w/ overgrown scribe
Leaning snag, 50 ft. high, bears N29°30'W, 69 lks (45.5 ft.), w/ visible scribe

Set a 32 ins. x 3-1/2 ins. dia. alum. pipe, 25 ins. in the ground w/ alum. cap. Buried the original stone alongside. Raised a 3 ft. dia. collar of stone around monument.

From which:

Fir, 6 ins. dia., bears N41°E, 35 lks (23.1 ft.), marked "T32N R34W S33 BT"
Fir, 6 ins. dia., bears N45°W, 26 lks (17.2 ft.), marked "T32N R34W S32 BT"

2010 Found: We find a 3-1/4 ins. dia. alum cap, marked as shown below, on 2-1/2" dia. pipe, rising 0.3 ft. from a mound of stone. From which:

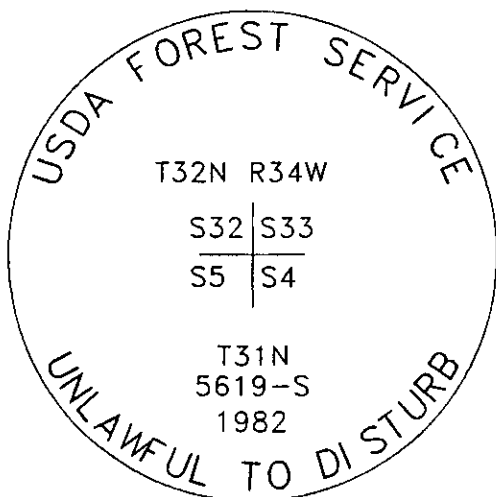
Grand Fir snag, 10 ins. dia., bears N43°30'E, 22.5 ft., w/ overgrown blaze & BT tag
Larch snag, 20 ins. dia., bears S54°30'E, 52.1 ft., w/ overgrown blaze & tag
Grand Fir snag, 10 ins. dia., bears S51°W, 25.2 ft., w/ overgrown blaze
Douglas Fir snag, 20 ins. dia., bears N29°W, 46.1 ft., Scribed "32 R 34 S32"

2010 Perpetuation: We establish new reference monuments as follows:

Hemlock, 13 ins. dia., bears N11°E, 40.0 ft., scribed "T32N R34W S33 BT"
Hemlock, 8 ins. dia., bears S39°30'E, 13.4 ft., scribed "T31N R34W S4 BT"
Grand Fir, 7 ins. dia., bears S72°W, 12.8 ft., scribed "T31N R34W S5 BT"
Douglas Fir, 12 ins. dia., bears N66°W, 9.1 ft., scribed "T32N R34W S32 BT"

We set galvanized steel posts, West, 1.8 ft. and East, 2.2 ft. from the monument w/ LSM and USFS boundary decals.

Bearing trees were affixed with BT tags, snow blazed and a painted red band.

**SKETCH OF CORNER****CERTIFICATION**

I, Keith Brandt
certify the information shown herein is true and correct.

Keith Brandt
Signature Ground Party Chief

I, Ken E Jenkins
certify that this Corner Record correctly represents work performed by Ken E Jenkins in my direction in compliance with the Montana Recordation Act" (70-22101, et seq., M.C.A.)

Ken E Jenkins
Signature of Surveyor & Seal

Date: 10/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Office of Clerk and Recorder, County of _____ This "corner

record" was filed for record on 231889 BOOK: CCR CCR'S PAGE: 11832 Pages: 1

was noted on the cross-index p: STATE OF MONTANA LINCOLN COUNTY

book No. TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00 BY: [Signature]
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA
County Official

Sec. 33