

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**Corner: Section Corner, Secs 2, 3, 34 & 35 T. 31 & 32N. R. 34W. P.M.M. Lincoln County

GLO Record: Set limestone and established 4 bearing trees.

1982 Record: Found original stone; from which:  
(Staab 5619S) Larch, 28 ins. dia., bears N31°E, 43 lks (28.4 ft.), w/ visible scribe  
Rotten stump & log, bears S71°30' E, 61 lks (40.3 ft.), w/ no visible scribing  
Rotten remains, bear S11°W, 80 lks (52.8 ft.), w/ no visible scribing  
Snag, 70 ft., bears N45°W, 48 lks (31.7 ft.), w/ visible scribing

Set a 32 ins. x 3-1/2 ins. dia. alum. pipe, 26 ins. in the ground w/ alum. cap. Raised a collar of stone around monument. Buried original stone alongside pipe. From which:

Fir, 12 ins. dia., bears N28°W, 36 lks (23.8 ft.), marked "T32N R34W S34 BT"  
Fir, 10 ins. dia., bears S10°W, 49 lks (32.3 ft.), marked "T31N R34W S3 BT"  
Fir, 10 ins. dia., bears S06°E, 34 lks (22.4 ft.), marked "T31N R34W S2 BT"

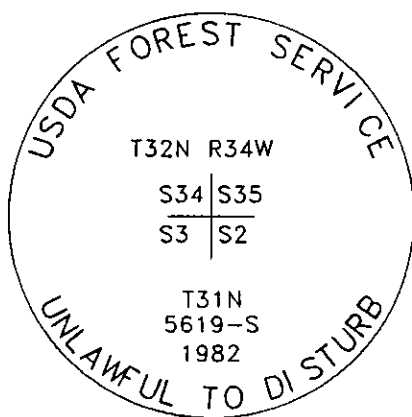
2010 Found: We find a 3-1/4 ins. dia. alum cap, as shown below, on 2-1/2 ins. dia. pipe, rising 0.2 ft. from a mound of stone. From which:

Stump, 16 ins. dia., bears N31°E, 28.4 ft., w/ visible scribing "2N 34 S35"  
Douglas Fir, 14 ins. dia., bears S07°E, 30.5 ft. (Record S06°E, 22.4 ft.), w/ overgrown blaze & BT tag  
Douglas Fir, 12 ins. dia., bears S49°W, 30.6 ft., (Record S10°W, 32.3 ft.), w/ overgrown blaze & BT tag  
Fir stump, 12 ins. dia., bears N23°W, 24.3 ft., (Record N28°W, 23.8 ft.), w/ partial scribing "T32R N"

2010 Perpetuation: We establish new reference monuments as follows:  
Cedar, 6 ins. dia., bears N16°30'E, 32.9 ft., scribed "T32N R34W S35 BT"  
Douglas Fir, 13 ins. dia., bears N70°W, 4.5 ft., scribed "T32N R34W S34 BT"

We set galvanized steel posts, West, 1.2 ft. and East, 2.2 ft. from the monument w/ LSM and USFS boundary decals.

Bearing trees were affixed with BT tags, snow blazed and a painted red band.

**SKETCH OF CORNER****CERTIFICATION**

I, Keith Brandt  
certify the information shown herein is true and correct.

Keith Brandt  
Signature Ground Party Chief

I, Ken E Jenkins  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Ken E Jenkins  
Signature of Surveyor & Seal

Date: 10/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 03/31/2011 231892 BOOK: CCR CC&R'S PAGE: 11835 Pages: 1  
was noted on the cross-index STATE OF MONTANA LINCOLN COUNTY  
book No. 5619S RECORDED: 03/31/2011 10:10 KOI: CC&R'S  
TAMMY D. LAUER CLERK AND RECORDER  
FEE: \$0.00 BY: Theresa Seaton Deputy  
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Cross Index No. Z 17 T. 32N R. 34W PMM

● - Corner this sheet

Sec. 34

