

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: SW 1/16 Corner: Sec. 36 T.32N. R. 34W. P.M.M. Lincoln County

1976 Record: Certificate of Survey No 305 by J.W. Ninneman: Set a 1/2 ins. x 24 ins. steal rod with cap stamped JN 534ES. No bearing trees.

1993 Record:
(Hughes, 7322LS): Found a 1/2 ins. dia. rebar, 3 ins. below the road surface, from which:

A pine, 18 ins. dia., bears S80°E, 36.0 ft., with "1/16" visible.

A pine, 19 ins. dia., bears N69°W, 34.6 ft., with "6 S6" visible.

At the position drove a 1/2 ins. dia. x 30 ins. long alum. rod, alongside the found rebar with a 3-1/4 ins. dia. alum. cap mkd. as shown. Cap is 3 ins. below grade of road.

2010 Found: Ascertain location of corner beneath newly paved road bed with metal detector from which:

A Ponderosa pine, 19 ins. dia., bears S83°E, 35.7 ft., with visible scribing.

A pine stump, 19 ins. dia., bears N73°W, 34.7 ft., with "1/16 S6" visible.

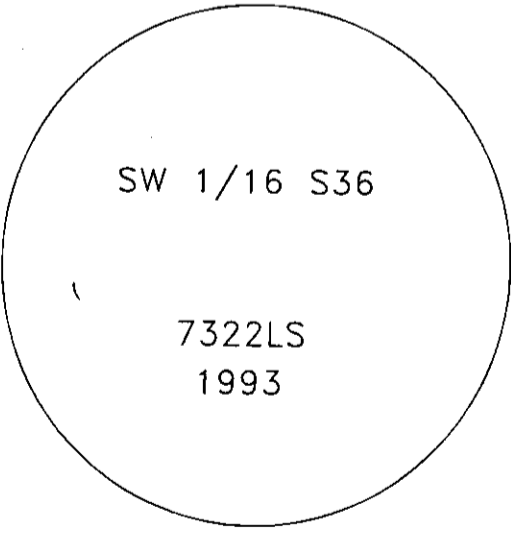
2010 Perpetuation: Establish new bearing tree as follows:

A Fir, 31 ins. dia., bears N0°E, 61.3 ft., scribed "1/16 S36 BT".

Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.

Steel spikes driven into BT's, side center at point of measurement.

Set a galvanized steel post East, 8.2 ft from the monument with LSM and USFS boundary decals.

 <p style="margin-top: 10px;">SKETCH OF CORNER</p>	<p style="text-align: center;">CERTIFICATION</p> <p>I, <u>Travis R. Williams</u> certify the information shown herein is true and correct.</p> <p style="text-align: center;"><i>Travis R. Williams</i> Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the <u>Montana</u> E. Recordation Act" (70-22-101; et seq.)</p> <p style="text-align: center;"><i>Ken E Jenkins</i> Signature of Surveyor & Seal</p> <p>Date: <u>12/2010</u> Reg. No. <u>9330 LS</u></p> <p>Employer: <u>Montana Northwest Company</u> <u>P.O. Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No.1617-10</u></p>
--	--

Office of Clerk and Recorder, County of _____ This "corner
record" was filed for record on _____ 231897 BOOK: CCR CC&R'S PAGE: 11840 Pages: 1
was noted on the cross-index plat _____ STATE OF MONTANA LINCOLN COUNTY
book No. _____ RECORDED: 03/31/2011 10:15 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: *Tammy D. Lauer*
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA
County Official

Sec. 36

