

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: N 1/16th Corner; Secs. 35&36 T.32N. R. 34W. P.M.M. Lincoln County

1983 Record:
(Hill, 5612 S)

Set a 3/4 ins. x 30 ins. aluminum rod, 26 ins. in the ground with a 3-1/4 ins. aluminum cap from which:

- A Douglas fir, 4 ins. dia., bears S23°E, 36.0 ft., scribed "N 1/16 S36 BT"
- A Douglas fir, 5 ins. dia., bears S65°W, 29.2 ft., scribed "N 1/16 S35 BT"

2010 Found:

We find a 3-1/4 ins. dia. U.S.D.A Forest Service aluminum cap, in small mound of stone, marked as shown below from which:

- A dead, standing fir, 12 ins. dia., bears S22°E, 35.7 ft., with an overgrown heel blaze.
- A dead, standing fir, 12 ins. dia., bears S63°W, 29.4 ft., with visible scribing in a partially overgrown heel blaze.


2010 Perpetuation: We establish new bearing trees as follows:

- A fir, 18 ins. dia., bears N58°E, 48.9 ft., scribed "N 1/16 S36 BT"
- A Ponderosa pine, 21 ins. dia., bears N70°W, 14.9 ft., scribed "N 1/16 S35 BT"

Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.

Metal spike driven into BT's side center at point of measurement

We set a galvanized steel post South, 0.3 ft of monument with LSM and USFS boundary decals.

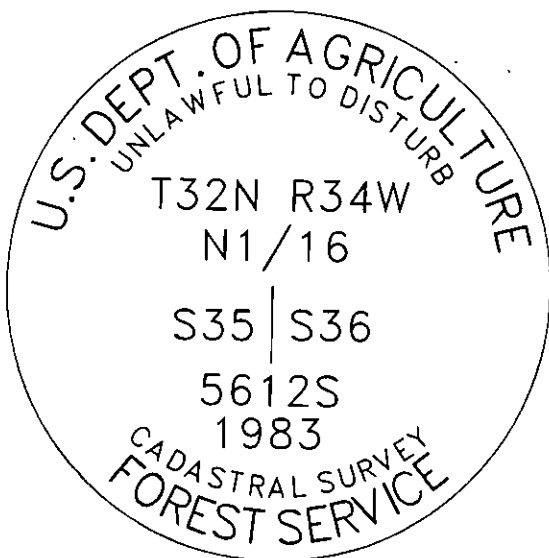

SKETCH OF CORNER

CERTIFICATION

I, Travis R. Williams
certify the information shown herein is true and correct.

Travis R. Williams
Signature Ground Party Chief

I, Ken E Jenkins
certify that this Corner Record correctly represents work performed by me on under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Ken E Jenkins
Signature of Surveyor & Seal

Date: 12/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

P.O. Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Office of Clerk and Recorder, County of _____

record" was filed for record

was noted on the cross-index

book No. _____

231900 BOOK: CCR CC&R'S PAGE: 11843 Pages: 1

STATE OF MONTANA LINCOLN COUNTY

RECORDED: 03/31/2011 10:18 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER


SEE: \$0.00

BY: *Jeannie Dennis*

TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 36



Cross Index No. W-21 T. 32N R. 34W PMM

● - Corner this sheet