

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: CE 1/16; Sec. 36 T. 32N. R. 34W. P.M.M. Lincoln County

1972 Record: From corner recordation form (BK. 1, PG. 255) by J.W.N. 534ES, set a "T" bar from which:

A fir, 14 ins. dia., bears S24°40'W, 8.5 ft., marked "C 1/16 E"
A fir, 8 ins. dia., bears N60°W, 8.9 ft., marked "C 1/16 E"

1983 Record:
(Hill, 5612S)

Found a "T" bar, 2 ins. out of the ground with 1 ins. metal cap. Bar bears N14°39'42"E, 8.89 ft. from corner position determined by this survey from which:

A snag, 15 ins. dia., bears S25°W, 8.5 ft., marked "C 1/16 E"
A fir, 6 ins. dia., bears N60°W, 9.0 ft., marked "C 1/16 E"


Set a 3/4 ins. x 30 ins. aluminum rod, 29 ins. in the ground at determined corner position with aluminum cap from which:

A fir, 6 ins. dia., bears N33°E, 16.5 ft., marked "C 1/16 E", (existing BT).
A fir, 15 ins. dia., bears S39°W, 27.6 ft., marked "X BT", (new BT).

2010 Found: We find a 3-1/4 ins. dia. aluminum cap in large mound of stone, marked as shown below from which:

A fir, 11 ins. dia., bears N35°E, 16.5 ft., with an overgrown heel blaze.
A fir, 16 ins. dia., bears S40°W, 27.6 ft., with an overgrown heel blaze.

2010 Perpetuation: Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.
Steel spikes driven into BT's, side center at point of measurement.
Set two galvanized steel post West, 2.3 ft. and South 5.3 ft. of the monument with LSM and USFS boundary decals.

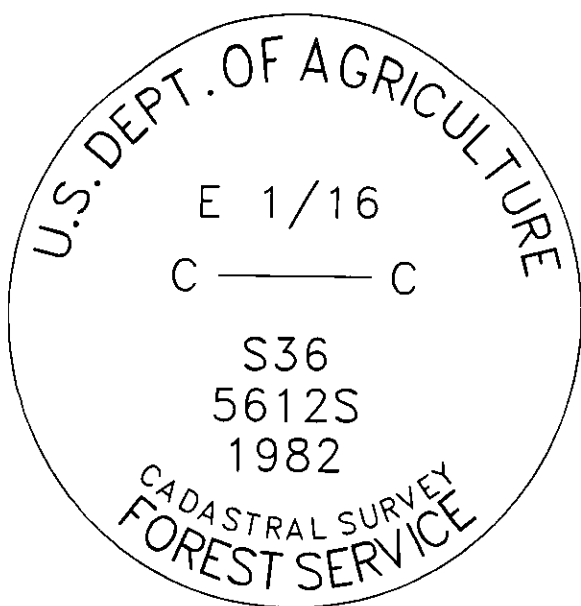

SKETCH OF CORNER

CERTIFICATION

I, Travis R. Williams
certify the information shown herein is true and correct.

Travis R. Williams
Signature Ground Party Chief

I, Ken E Jenkins
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Cadastral Survey Recordation Act" (70-22-101, et seq., M.C.A.)

Ken E Jenkins
Signature of Surveyor & Seal

Date: 12/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

P.O. Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Office of Clerk and Recorder, County of _____ This "corner
record" was filed for record on 231902 BOOK: CCR CC&R'S PAGE: 11845 Pages: 1
was noted on the cross-index | STATE OF MONTANA LINCOLN COUNTY
book No. _____ | RECORDED: 03/31/2011 10:20 KOI: CC&R'S
| TAMMY D. LAUER CLERK AND RECORDER
| FEE: \$0.00 BY: *Heather Lauer*
| TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 36

