

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: C-E-W-NE 1/256 Corner; Sec. 14 T.32N. R. 34W. P.M.M. Lincoln County

1975 Record:
(Shaw, 2343S)

Set a 1-1/2 ins. x 30 ins. brass capped pipe, 24 ins. in the ground from which:

A Ponderosa pine, 22 ins. dia., bears N67°E, 24.0 ft., scribed "RM1"
A Douglas fir, 10 ins. dia., bears S30°W, 19.6 ft., scribed "RM2"

2010 Found:

We find a 2-1/2 ins. dia. brass cap on 1-1/2 ins. dia. metal pipe, set firm, marked as shown below from which:

A pine stump, 24 ins. dia., bears N59°E, 24.0 ft., scribed "RM1"
Note: Bearing differs from that of record by 8°
A fir, 13 ins. dia., bears S27°W, 19.6 ft., with an overgrown heel blaze.

2010 Perpetuation: Establish a new bearing tree as follows:


A fir, 8 ins. dia., bears S82°W, 8.8 ft., scribed "1/256 S14 RM"

Bearing trees affixed with BT tags, LSM signs, snow blazed and painted red bands.

Metal spike driven into BT's side center at point of measurement.

Set a galvanized steel post East, 0.9 ft from the monument with LSM and USFS boundary decals.


NOTE: MARKINGS ON CAP DIFFER FROM THAT OF RECORD.

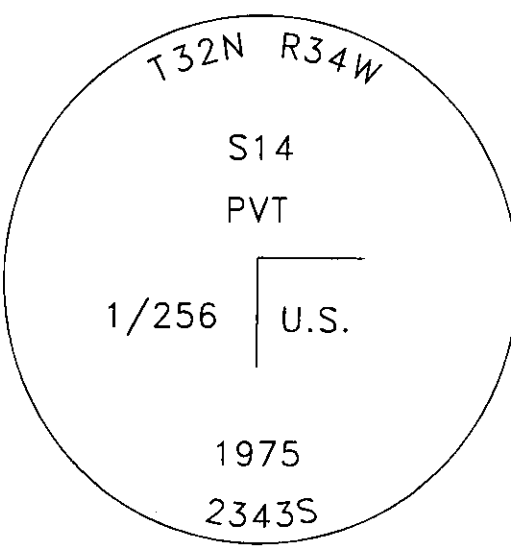 <p>SKETCH OF CORNER</p>	<p style="text-align: center;">CERTIFICATION</p> <p>I, <u>Travis R. Williams</u> certify the information shown herein is true and correct.</p> <p style="text-align: center;"><i>[Signature]</i> Signature Ground Party Chief</p> <p>I, <u>Ken E Jenkins</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq.)</p> <p style="text-align: center;"><i>[Signature]</i> Signature of Surveyor & Seal</p> <p>Date: <u>12/2010</u> Reg. No. <u>9330 LS</u> Employer: <u>Montana Northwest Company</u> <u>P.O. Box 8777, Missoula, MT 59807</u> <u>406-721-4033 Project No. 1617-10</u></p>
--------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Office of Clerk and Recorder, County of _____ This "corner record" was filed for record on _____ 231906 BOOK: CCR CC&R'S PAGE: 11849 Pages: 1
was noted on the cross-index _____ STATE OF MONTANA LINCOLN COUNTY
book No. _____ RECORDED: 03/31/2011 10:24 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: *[Signature]*
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 14

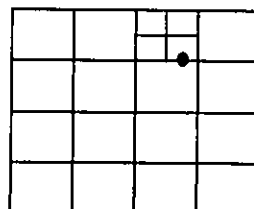

Cross Index No. K-19.75 T. 32N R. 34W PMM

- Corner this sheet