

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**

Corner: Section Corner Secs 25, 26 35, 36 T. 32N. R. 34W. P.M.M. Lincoln  
County

1903 GLO Record: Set limestone and established 4 bearing trees.

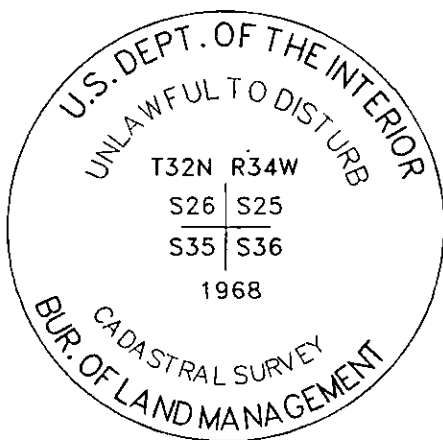
1968 Record: BLM Remonumentation  
(W E Damm) Set a 2-1/2 ins. dia. iron pipe, 30 ins. long, 10 ins. in the ground w/a brass cap. Established 4 bearing trees.  
Buried original stone alongside.

1983 Record: Found 2-1/2 ins. dia. brass cap, 15 ins. out of the ground and 4 live bearing trees.  
(Hill 5612S)

1993 Record: Found iron pipe, 15 ins. above ground, firmly set w/ 2-1/2 ins. dia. BLM brass  
(Hughes 7322LS) cap. From which:  
Fir, 11 ins. dia., bears N 57°E, 25.2 ft. (38.1 lks), w/ healed face  
Fir, 14 ins. dia., bears S16°E, 34.8 ft. (52.7 lks), w/ healed face  
Fir snag, 11 ins. dia., bears S32°W, 29.5 ft. (44.7 lks), w/ visible scribing  
Fir, 10 ins. dia., bears N54°W, 19.7 ft. (29.8 lks), w/ healed face

2010 Found: We find a std. BLM brass cap, marked as shown below, on 2-1/2" dia. steel pipe, rising 1.1 ft. from a mound of stone. From which:  
Douglas Fir, 12 ins. dia., bears N 58°E, 25.2 ft., w/ overgrown blaze  
Ponderosa Pine, 8-1/2 ins. dia., bears S43°E, 26.9 ft., scribed "T32NR34WS36BT"  
Ponderosa Pine, 11 ins. dia., bears S43°W, 36.3 ft., w/ partially visible scribing  
Fir snag, 12-1/2 ins. dia., bears S16°E, 34.8 ft., w/ BT tags  
Fir stump, 12 ins. dia., bears S30°30'W, 35.1 ft., w/ BT tags  
Fir stump, 12.5 ins. dia., bears S45°W, 28.2 ft., w/ BT tags on fallen log  
Fir snag, 12 ins. dia., bears N54°W, 19.7 ft., w/ BT tags

2010 Perpetuation: We establish new reference monument as follows:  
Ponderosa Pine, 6 ins. dia., bears N74°30'W, 24.1 ft., scribed "T32NR34WS26BT"  
We set a galvanized steel post, East, 1.7 ft. from the monument w/ LSM and USFS boundary decals.  
Bearing trees were affixed with BT tags, snow blazed, and a painted red band.

**SKETCH OF CORNER****CERTIFICATION**

I, Keith Brandt  
certify the information shown herein is true and correct.

Keith Brandt  
Signature Ground Party Chief

I, Ken E Jenkins  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Ken E Jenkins  
Signature of Surveyor & Seal

Date: 12/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Office of Clerk and Recorder, County of \_\_\_\_\_ This "corner  
record" was filed for record 231912 BOOK: CCR CCR'S PAGE: 11855 Pages: 1  
STATE OF MONTANA LINCOLN COUNTY  
was noted on the cross-index RECORDED: 03/31/2011 10:30 KOI: CCR'S  
TAMMY D. LAUER CLERK AND RECORDER  
book No. \_\_\_\_\_ FEE: \$0.00 BY: Tammy D. Lauer  
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 25

