

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: 1/4 Corner: Secs 25 & 30 T. 32N. R. 34 & 35W. P.M.M. Lincoln County

1903 GLO Record: Set granite stone and established 2 bearing trees.

1967 BLM Record: Found granite stone, loosely set and the remains of NE bearing tree.
Set an iron post, 2-1/2 ins. dia. x 30 ins., 24 ins. in the ground w/ brass cap. Buried original stone alongside.

From which:

Fir, dead, 8 ins. dia., bears N64°E, 13 lks (8.6 ft.), mkd "1/4 S3B"

New bearing trees:

Fir, 8 ins. dia., bears N36°30'E, 29 lks (19.1 ft.), mkd "1/4 S30 BT"

Fir, 11 ins. dia., bears S26°W, 56 lks (37.0 ft.), mkd "1/4 S25 BT"

1987 Record: Found BLM brass cap, 6 ins. above the ground.

(Hill 5612 S)

From which:

Fir, 8 ins. dia., bears N36°E, 19.5 ft., w/ visible scribing

Stump, bears S27°W, 37 ft., w/ visible scribing

Established new bearing tree:

Douglas fir, 15 ins. dia., bears N83°W, 39.1 ft., mkd "1/4 S25 BT"

2010 Found: We find a 3-1/4 ins. dia. brass cap, marked as shown below, on 2-1/2 ins. dia. steel pipe, rising 0.5 ft. from the ground.

From which:

Grand Fir, 13 ins. dia., bears N35°30'E, 19.6 ft., w/ overgrown face blaze


Douglas fir, 15 ins. dia., bears N83°30'W, 39.1 ft., w/ overgrown face blaze

Stump, bears S27°W, 37.0 ft., decayed & unrecognizable

2010 Perpetuation: We establish no new reference monuments.

We set galvanized steel posts, North, 1.2 ft. and South, 1.2 ft. from the monument w/ LSM and USFS boundary decals.

Bearing trees were affixed with BT tags and a painted red band.

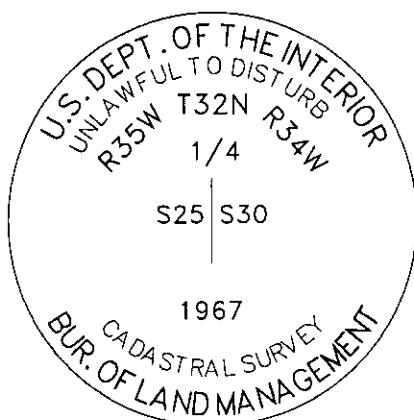**SKETCH OF CORNER****CERTIFICATION**

I, Keith Brandt
certify the information shown herein is true and correct.

Keith Brandt
Signature Ground Party Chief

I, Ken E Jenkins
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Ken E Jenkins
Signature of Surveyor & Sealer

Date: 10/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Sec. 25

Office of Clerk and Recorder, County of _____ This "corner

record" was filed for rec 231913 BOOK: CCR CC&R'S PAGE: 11856 Pages: 1

was noted on the cross-i STATE OF MONTANA LINCOLN COUNTY


book No. _____ RECORDED: 03/31/2011 10:31 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00 BY: Tammy D. Lauer Deputy

TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official



Cross Index No. T25 T. 32N R. 35W PMM

T1 32 34

● - Corner this sheet