

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**

Corner: 1/4 Corner, Section 13 & 18 T. 32N. R. 34 & 35W P.M.M. Lincoln County

1968 BLM Record: Set 2-1/2 ins. dia. x 30 ins. long iron pipe, 24 ins. in the ground, with brass cap. Buried original stone alongside. From which:  
Hemlock, 13 ins. dia., bears S52°15'E, 29 lks (19.1 ft.), scribed "S18 BT"  
Cedar, 8 ins. dia., bears N32°W, 60 lks (39.6 ft.), scribed "S13 BT"

1982 Record: Found 2-1/2 ins. dia. brass cap, approx. 8 ins. above the ground with a collar of stone.  
(Hill 5612 S) From which:  
Snag, 16 ins. dia., bears S43°E, (Record S52°15'E) 19.1 ft., mkd "1/4 S18 BT"  
Cedar, 8 ins. dia., bears N35°W, 39.3 ft., mkd "1/4 S13 BT"

Established new bearing tree  
Hemlock, 20 ins. dia., bears S19°W, 12.2 ft., mkd "S18 BT"

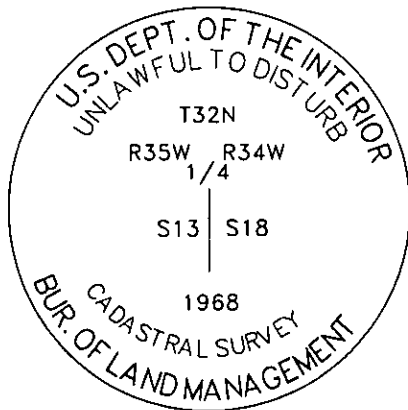
2010 Found: We find a 3-1/4 ins. dia. brass cap, marked as shown below, on 2-1/2 ins. dia. steel pipe, rising 0.6 ft. from the ground, from which:  
Dead fall, 17 ins. dia., bears S79°E, 9.8 ft., no visible scribing, BT tag intact  
Hemlock, 20 ins. dia., bears S14°W (Record S19°W), 12.3 ft., w/ overgrown face blaze & BT tag  
Cedar, 13 ins. dia., bears N32°W, 39.3 ft., w/ overgrown face blaze

2010 Perpetuation: We establish no new reference monuments.

We set galvanized steel fence posts, East, 1.2 ft. and South, 1.1 ft. from the monument w/ LSM and USFS boundary decals.

Bearing trees were affixed with BT tags, snow blazed and a painted red band.

We add stones around the monument.

**SKETCH OF CORNER****CERTIFICATION**

I, Keith Brandt  
certify the information shown herein is true and correct.

Keith Brandt  
Signature Ground Party Chief

I, Ken E Jenkins  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner E. Recordation Act" (70-22-101, et seq., M.S.A.).

Ken E Jenkins  
Signature of Surveyor & Seal

Date: 12/2010 Reg. No. 9330 LSUR

Employer: Montana Northwest Company

PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Sec. 13

Office of Clerk and Recorder, County of \_\_\_\_\_ This "corner  
record" was filed for record on 231914 BOOK: CCR CC&R'S PAGE: 11857 Pages: 1  
was noted on the cross-index ] STATE OF MONTANA LINCOLN COUNTY  
book No. \_\_\_\_\_ RECORDED: 03/31/2011 10:32 KOI: CC&R'S  
TAMMY D. LAUER CLERK AND RECORDER  
FEE: \$0.00 BY: [Signature] Deputy  
TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official



Cross Index No. L25 T. 32N R. 35W PMM  
L1 32 34

● - Corner this sheet