

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories,
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner: Section Corner Secs 24, 25, 19 & 30 T. 32N. R. 34, 35W. P.M.M. Lincoln County

1903 GLO Record: Set limestone and established 4 bearing trees.

1987 Record: Found limestone, loosely set in a small mound of stones.

(Hughes 7322 LS)

From which:

Stump hole, bears N75°E, 15.1 ft.

Grand Fir, 24 ins. dia., bears S44°E, 6.2 ft., w/ healed face

Decaying fir stump, 28 ins. dia., bears S40°W, 43.0 ft., w/ visible scribing "32N 35 S25"

NOTE: All distances were measured from the highest point on the stone.

At the position of the found stone, set a 2-1/2 ins. dia. x 30 ins. alum. post, 24 ins. in the ground, in a mound of stone, w/ 3-1/4 ins. dia. alum. cap. Buried original stone on east side of monument.

Established 3 new bearing trees:

Grand fir, 13 ins. dia., bears N64°E, 9.0 ft., scribed "T32N R34W S19 BT"

Grand fir, 6 ins. dia., bears S58°W, 19.3 ft., scribed "T32N R35W S25 BT"

Douglas fir, 12 ins. dia., bears N08°W, 17.1 ft., scribed "T32N R35W S24 BT"

2010 Found:

We find a 3-1/4 ins. dia. alum. cap, marked as shown below, on 2-1/2 ins. dia. alum. pipe, rising 0.3 ft. from a loose mound of stone.

From which:

Rotten, downfall, 11 ins. dia., bears N70°E (Record N64°E), 9.1 ft., scribed "T32N R34W S19 BT"

Fir snag, 22 ins. dia., bears S48°E, 6.0 ft., w/LSM sign, no visible scribing

Grand fir, 10 ins. dia., bears S57°W, 19.3 ft., w/ overgrown blaze & LSM sign

Douglas fir, 15 ins. dia., bears N09°W, 17.1 ft., scribed "T32N R35W S24 BT"

Cedar, 15 ins. dia., bears N04°W, 10.6 ft., w/ healed face blaze & red painted band

(NOTE: Not on record.)

2010 Perpetuation:


We establish new reference monuments as follows:

Grand Fir, 12 ins. dia., bears N30°E, 24.1 ft., scribed "T32N R34W S19 BT"

Cedar, 10 ins. dia., bears S77°E, 35.5 ft., scribed "T32N R34W S30 BT"

We set galvanized steel posts, South, 1.3 ft. and North, 1.5 ft. from the monument w/ LSM and USFS boundary decals.

Bearing trees were affixed with BT tags, snow blazed, and a painted red band.

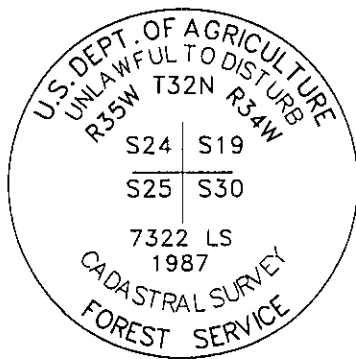

SKETCH OF CORNER

CERTIFICATION

I, Keith Brandt
certify the information shown herein is true and correct.

Keith Brandt
Signature Ground Party Chief

I, Ken E Jenkins
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.L.A.)

Ken E Jenkins
Signature of Surveyor & Seal

Date: 9/2010 Reg. No. 9330 LS

Employer: Montana Northwest Company

PO Box 8777, Missoula, MT 59807

406-721-4033 Project No. 1617-10

Office of Clerk and Recorder, County of _____ This "corner record" was filed for record c
was noted on the cross-index
book No. _____

231915 BOOK: CCR CC&R'S PAGE: 11858 Pages: 1

STATE OF MONTANA LINCOLN COUNTY

RECORDED: 03/31/2011 10:33 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER


FEE: \$0.00

BY: Ken E Jenkins

TO: MONTANA NORTHWEST COMPANY P.O. BOX 8777, MISSOULA, MONTANA

County Official

Sec. 24



Cross Index No. R25 T. 32N R. 35W PMM

R1 32 34

● - Corner this sheet