

## INSTRUCTIONS


1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner N.  $\frac{1}{4}$  of Section 10  $\frac{3}{16}$  T. 32N R. 34W P.M.M. Lincoln County

1. 1903 GLO Record: Corner falls on ledge of rock 8x8x6 ft. above ground ( ) at exact corner point for  $\frac{1}{4}$  se. cor., mkd.  $\frac{1}{4}$  on N. side and raised a mound of stone 2 ft. base,  $1\frac{1}{2}$  ft. high N. of corner.
11. I found a 8x8x6 ft. rock ledge. No other evidence of corner.

The position of the corner was determined as follows, midway between two adjacent sec. corners:

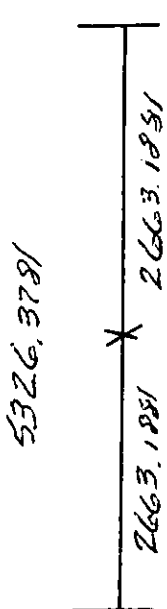

At the corner point: (which falls 2 ft. up from the bottom of an 8x8x6 ft. rock ledge)

111. I set a  $2\frac{1}{2}$  in. diam. aluminum cap in the rock face marked:



from which:


A red fir 7 in. diam. DBH, bears S  $30^{\circ}$  W., 7.5 ft. This tree is badly deformed and scarred on the butt.

- 1V. I drove a 6x3/8 in. spike into the tree DBH and attached BT. signs both front and back.

North



SKETCH OF CORNER



## CERTIFICATION

1. Tom Davis  
certify the information shown herein is true and correct.  
Signature Ground Party Chief


1. Ken E. Davis  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)  
Signature of Surveyor & Seal

Date: 1984 Reg. No. 99755  
Employer: \_\_\_\_\_


Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the December 12 day of 1984 was noted on the cross-index plat and is assigned page No. 2841, in book No. \_\_\_\_\_

Janet B. F. Siegel by Karen R. Lampe  
County Official

Cross Index No. S. 10 T. 32 R. 34 P.M.M.



• - corner this sheet

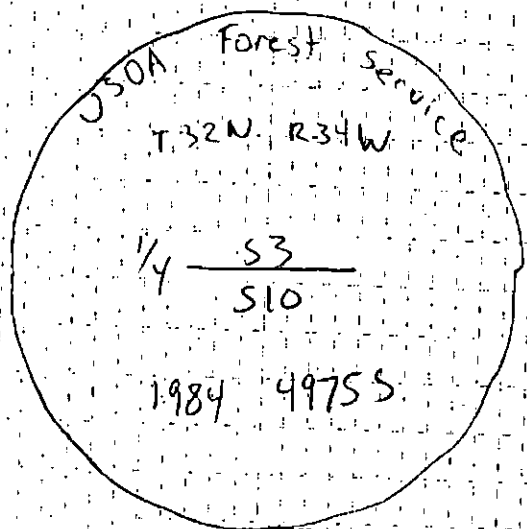

21" DBH Douglas Fir  
Scribed x 1/4 S3 BT

N 20° E  
26.3 FT  
1984 49755

15 1/2" DBH Douglas Fir  
Scribed x 1/4 S10 BT

