

# CERTIFIED LAND CORNER RECORDATION

## DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

ORIGINAL G.L.O. NOTES: "Set a granite stone 17x8x5 ins. 12 ins. in the ground for the 1/4 sec. cor. marked 1/4 on N. face, from which  
A tamarack, 20 ins. in dia. bears 4N.52°E., 72 lks. dist., mkd. 1/4 S 25 B T.  
A fir, 4 ins. in dia., bears S28°W., 6 lks. dist. mkd. 1/4 S 25 B T."

FOUND:



FOUND BRASS CAP MONUMENT SET BY THE B.L.M.

## DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

ORIGINAL EVIDENCE FOUND

NEW EVIDENCE FOUND OR SET

Date of work: Aug. 1981

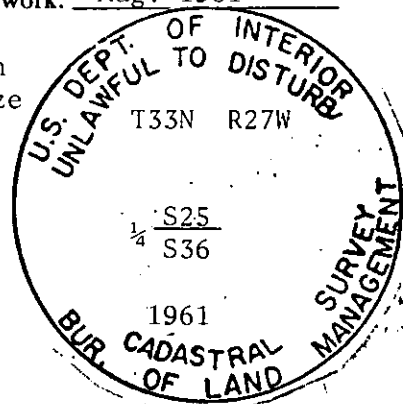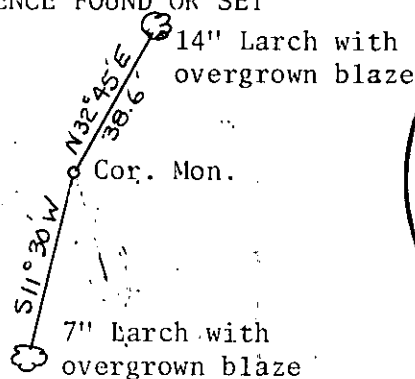

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.  
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

DIAGRAM OF CORNER:  
T33N R27W

Surveyor's Seal

I, EDWARD FOY  
certify that the information shown herein is true and correct.

Edward W. Foy  
Signature of Ground Party Chief

I, JAMES BURTON  
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

James Burton  
Signature of Surveyor

5428S

Registration Number



S25  
S36

= Corner recorded on the sheet

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 14th day of January 19 82, was noted on the cross-index plat and is

assigned page No. 1480, in book No. \_\_\_\_\_

Eleanor L. Vaughn by Betty L. Conces  
County Official deputy

Cross Index No. V-23 T 33 R 27 Mer.

