

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner West 1/16 Corner Secs. 27 & 34 T. 33N R. 27W P.M.M. Lincoln County

ORIGINAL G.L.O. NOTES: THIS CORNER WAS NEVER SET

Set 2 1/2" X 30" Aluminum Monument with 3 1/4" cap.
Marked as shown.


T33N R27W

W 1/16 $\frac{S27}{S34}$

2520S

1981

SEE CERTIFICATE OF SURVEY NO. 1007 FOR SECTION BREAKDOWN

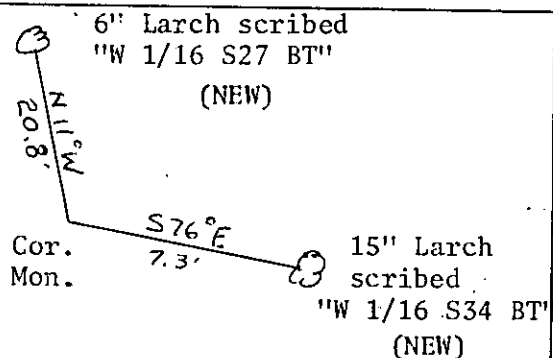

SKETCH OF CORNER

CERTIFICATION

I, EDWARD FOY

certify the information shown herein is true and correct.

Edward Foy
Signature Ground Party Chief

I, M. L. HAIGES

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101) et seq., M.C.A.

M. L. Haiges
Signature of Surveyor & Seal

Date: 12/1981 Reg. No. 2520S


Employer:

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the March 2nd day of 1982 was noted on the cross-index plat and is assigned page No. 1571, in book No. 1

Eleanor L. Vaughn by Betty L. Conner
County Official deputy

Cross Index No. V-14 T. 33 R. 27 PMM

Sec. 27



• - corner this sheet

THE UNITED STATES OF AMERICA

DEPARTMENT OF THE INTERIOR

BUREAU OF LAND MANAGEMENT

WASHINGTON, D. C. 20250

10-10-60

22

10-10-60