INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner S-N-N 1/256 S24 | S19 T. 33N R. 27W | 26W P.M.M. Lincoln County

There is no previous record of this corner having been set.

Set a 2 in x 30 in. Aluminium Pipe with a 3½ in diameter Aluminium cap stamped as shown. Raised a collar of stone.

From which

A 14" Tam. bears N30°W, 31.90 ft. scribed "S-N-N 1/256 S24 B"

A 13" Tam. bears S60°W, 25.70 ft. scribed "S-N-N 1/256 S24 B"

USDA FOREST SERVICE
T33N
S24 | S19
R27W | R26W
S-N-N 1/256
1981
SMITH 4740S
UNLAWFUL TO DISTURB

SKETCH OF CORNER

CERTIFICATION

I. Thomas Van Slyke certify the information shown herein is true and correct.

Thomas Va. Slyke
Signature Ground Party Chief

I. S. R. SMITH certify that this Corner Record correctly represents work performed by me or under by direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

S R Smith
Signature of Surveyor & Seal

Date: 2/19/82 Reg. No. 4740S

Employer: SMITH SURVEYING CO.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the July 28th day of 1982 was noted on the cross-index plat and is assigned page No. 1820, in book No. _____

Eleanor L. Vaughn by Betty L. Conces deputy
County Official

Cross Index No. O-25 T. 33N R. 27W PMM

Sec. 24

• - corner this sheet

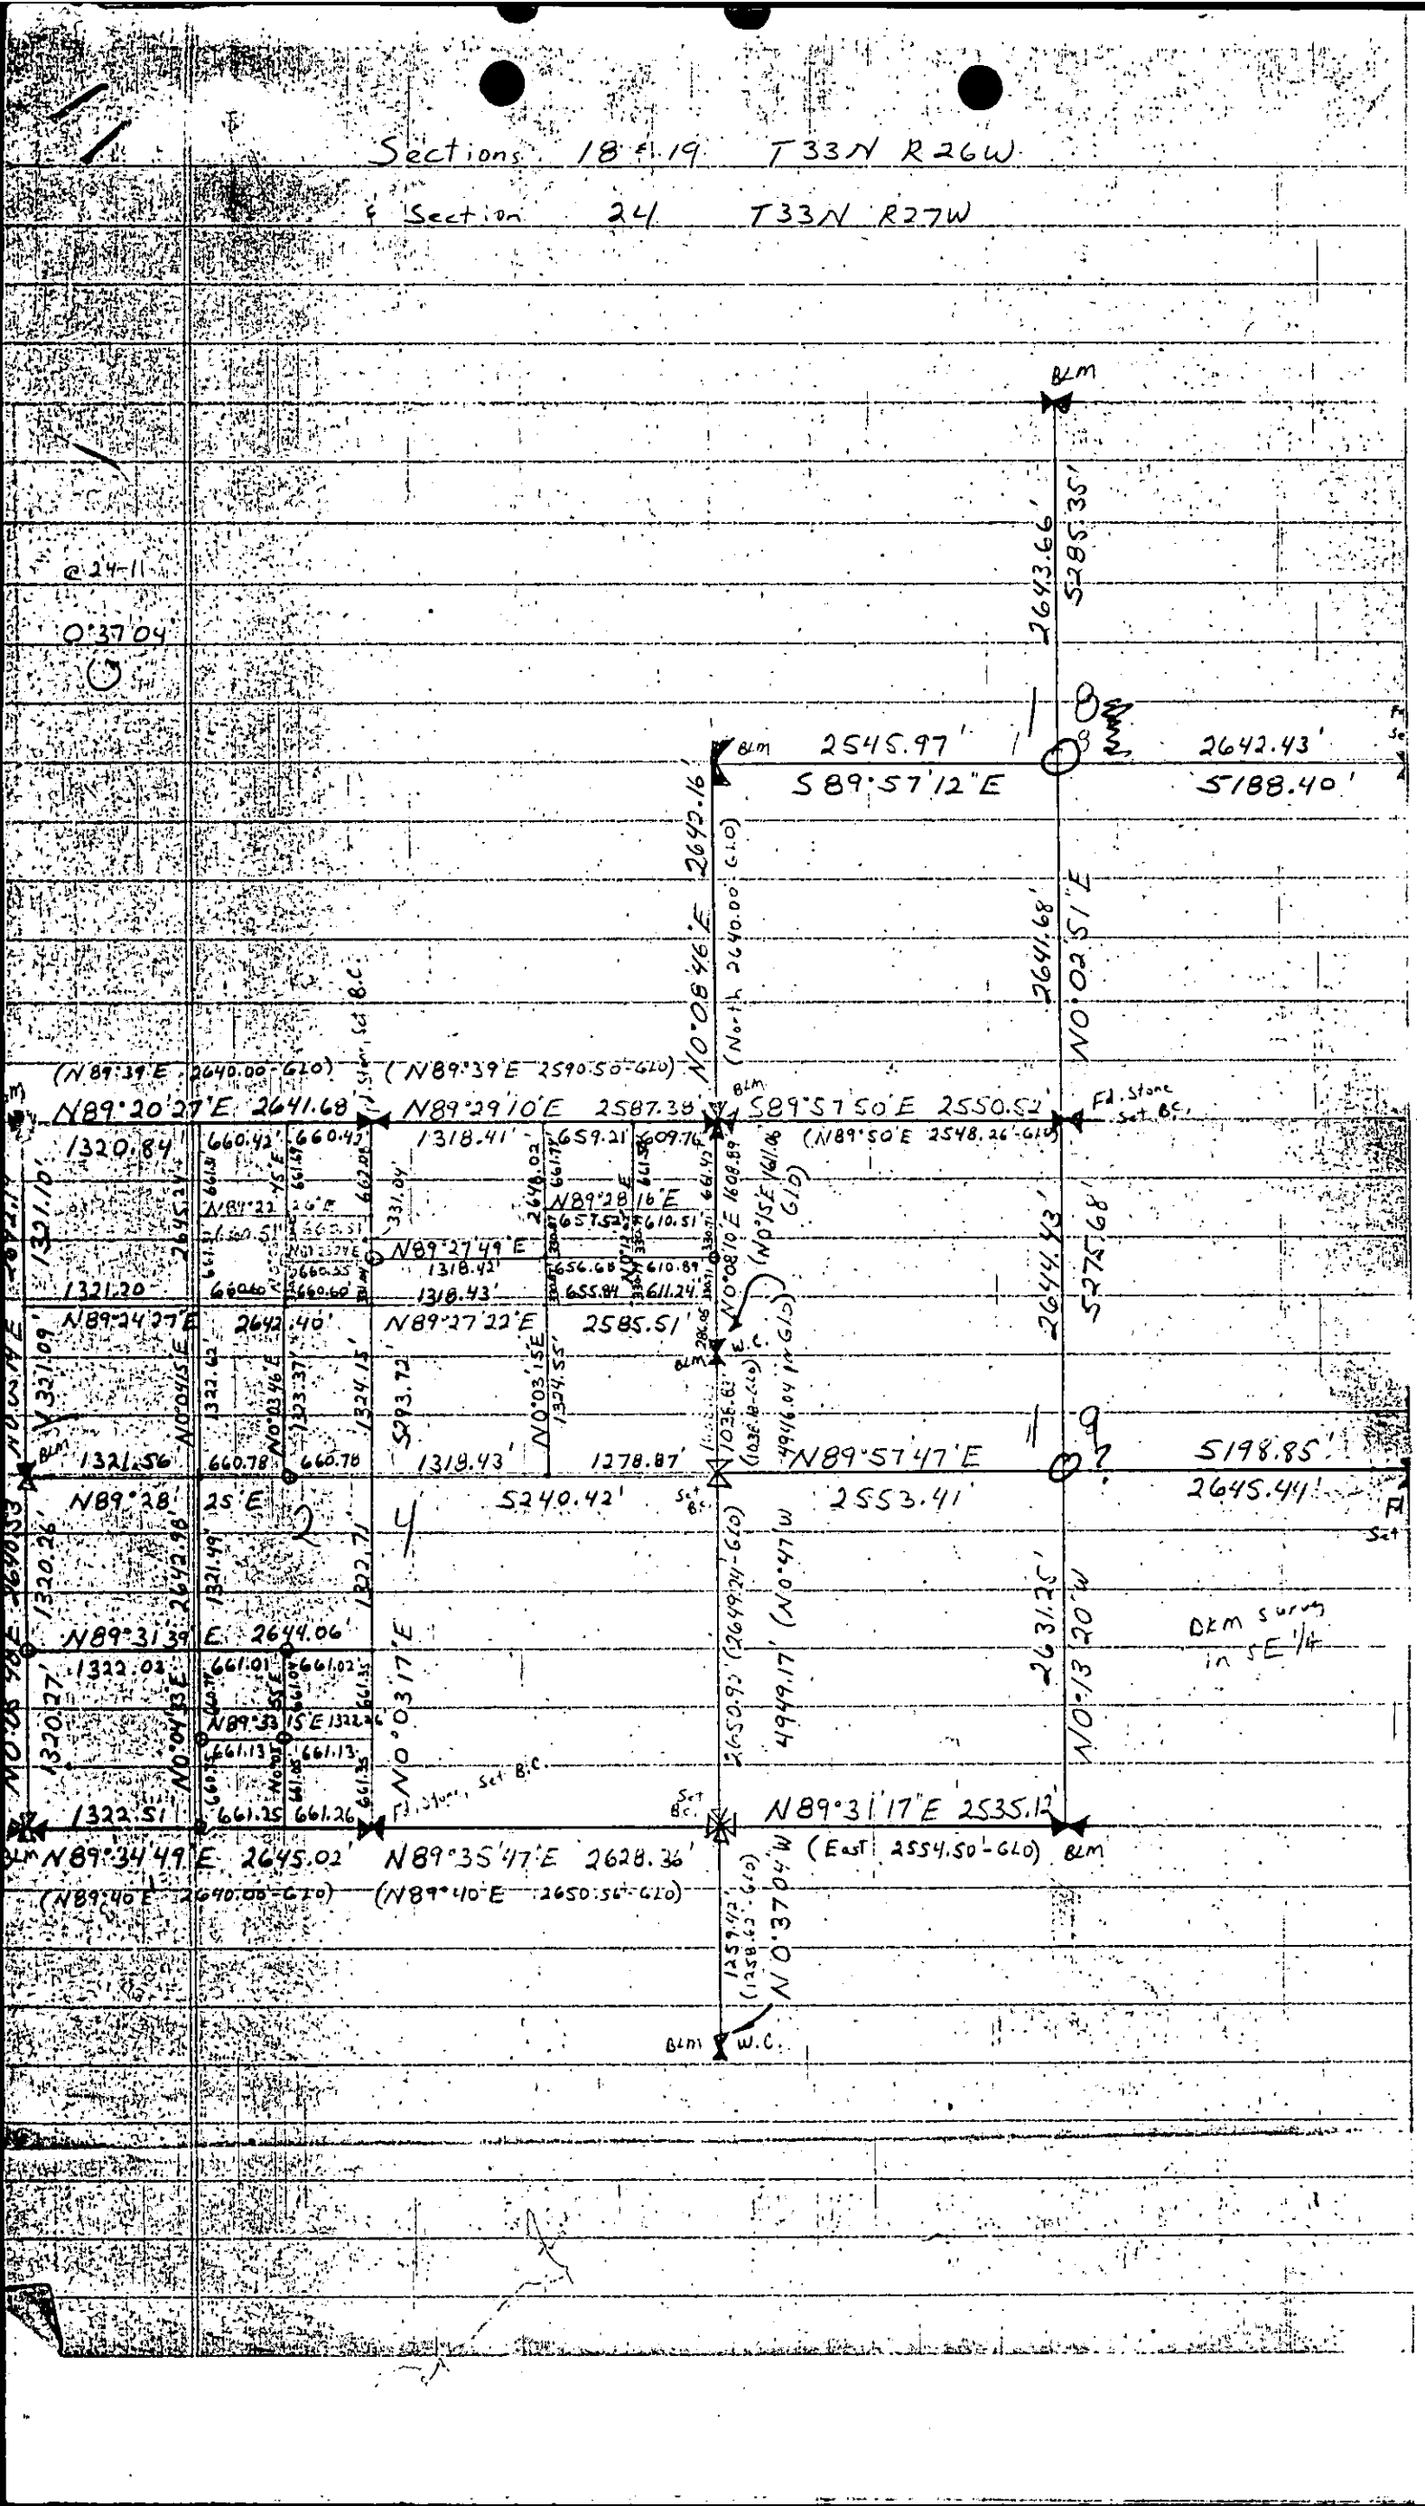
Sections 18 & 19 T33N R26W
& Section 24 T33N R27W
BLM
2643.66'
S285°35'E
2545.97'
S89°57'12"E
2642.43'
S188.40'
2642.16'
N0°08'46"E
(North 2640.00'-GLO)
2641.68'
N0°02'51"E
(N89°39'E 2640.00'-GLO)
(N89°39'E 2590.50'-GLO)
N89°20'27"E 2641.68'
N89°29'10"E 2587.38'
S89°57'50"E 2550.52'
Fd. Stone Set B.C.
(N89°50'E 2548.26'-GLO)
1320.84
1318.41'
659.21'
N89°28'16"E
1321.10'
N89°27'49"E
1318.43'
N89°27'22"E
2585.51'
N0°08'10"E 1608.89'
(N0°15'E 1611.06' GLO)
2644.43'
S275°68'
1321.20'
N89°24'27"E
2642.40'
N0°03'15"E
1324.55'
S293.72'
1038.61'
(1036.80'-GLO)
N89°57'47"E
2553.41'
5198.85'
2645.41'
1321.56'
660.78'
1318.43'
1278.87'
S240.42'
N89°28'25"E
1320.26'
1321.49'
1322.71'
N89°31'39"E 2644.06'
1322.03'
661.01'
661.02'
661.35'
1320.27'
N89°33'15"E 1322.26'
661.13'
661.13'
661.25'
661.26'
N0°03'17"E
2650.92'
(2649.24'-GLO)
4949.17'
(N0°47'W 4996.04'-GLO)
2631.25'
N0°13'20"W
0km survey in SE 1/4
Fd. Stone, Set B.C.
Set B.C.
N89°31'17"E 2535.12'
(East 2554.50'-GLO)
BLM
1322.51'
N89°34'49"E 2645.02'
N89°35'47"E 2628.36'
(N89°40'E 2640.00'-GLO)
(N89°40'E 2650.56'-GLO)
1259.13'
(1258.63'-GLO)
N0°37'04"W
W.C.