

- INSTRUCTIONS**
1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography etc., position of accessories, etc.
 5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 26125 sec.25

T. 33N

R. 27W

P.M.M. LINCOLN

County

RECORD: (B.L.M.) The 1/4 sec. cor. of secs. 25 and 26, monumented with a slate stone, 20X10X6 ins., firmly set in the ground and mkd. 1/4 on the W. face.


from which the original bearing trees:

A larch, 24 ins. diam., bears N. 28° E. 32 lks. dist., with scribing overgrown.
(Record: N. 24 E., 32 lks. dist.)

A fir, 16 ins. diam., bears S. 41° N., 33 lks. dist., with scribing overgrown.
(Record: S. 35 W., 32 lks. dist.)

At the corner point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.

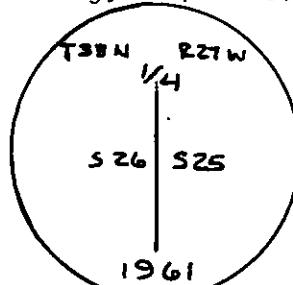

from which

A spruce, 12 ins. diam., bears N. 87° E., 4 lks dist., mkd. 1/4 S25 BT.

A spruce, 7 ins. diam., bears N. $28 1/2^{\circ}$ W., 36 lks dist., mkd. 1/4 S26 BT.

Bury the original stone alongside the iron post.

Set a wooden post, 6 ft. long, 6 ins. diam., in the ground alongside the iron post.

FOUND: B.L.M. brass cap as described above.

from which


A 17 ins. stump bears S. 41° W. 21.8 feet dist., scribing visible.

A new BT


A pine 4 ins diam., bears N. 20° W. 7.1 feet dist., scribed 1/4 BT.

A new BT

A pine 4 ins diam., bears S 58° E 20.5 feet dist., scribed 1/4 BT.

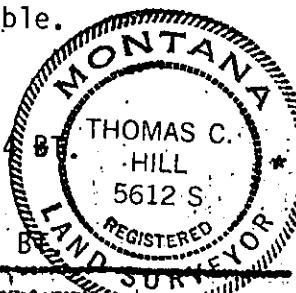

Q 4" PINE

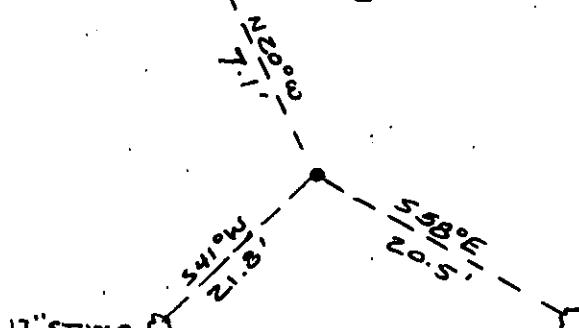

SKETCH OF CORNER 4" PINE

1. James W. Reed

Certify the information shown herein is true and correct.

James W. Reed
Signature of Party Chair

1. Thomas C. Hill

Certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Surveyor's Recording Act (10-22-101, et seq., M.D.A.).

Thomas C. Hill
Signature of Surveyor & Seal

Date: 11/5/82 Reg. No. 5612 S

Employer: U.S.F.S.

Office of Clerk and Recorder, County of Lincoln

record" was filed for record on the Dec. 29


was noted on the cross-index plat and is assigned page No. 2116, in

book No. _____

*Eleanor L. Vaughn by Betty L. Conces
County Official Deputy*

Cross Index No. _____

T. 33 R. 27 P.M.M.

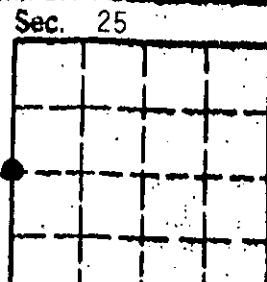

* - corner this sheet

