

# CERTIFIED CORNER RECORDATION

Corner 1/4 Secs. 32&33 T. 33N R. 34W P.M., MT Lincoln County

- I. 1912 G.L.O. Record by William C. Perkins: Set a shale stone, 16x8x5 ins., 11 ins. in the ground for the 1/4 sec. cor. of secs. 32 and 33, mkd. "1/4" on W. face.

Established two bearing trees:


A pine, 4 ins. diam., bears S30°E, 29 lks. dist., mkd "1/4 S33 BT".  
A tamarack, 4 ins. diam., bears S42°W, 27 lks. dist., mkd "1/4 S32 BT".

- II. Found stone, 6x7 ins., protruding 5 ins. above the ground, firmly set, mkd. "1/4" on W. face.

from which:


A larch, 6 ins. diam., bears S42°W, 17.8 ft. dist., with a burnt healed face. (record)

- III. At the exact corner position, as determined by the found original stone and witnessed by one original bearing tree, set a 2 1/2 in. diam. aluminum pipe, 30 ins. long, 26 ins. in the ground, with a 3 1/4 in. diam. aluminum cap, mkd. as shown.



No live trees within limits for bearing trees.  
Bury the original stone alongside the aluminum pipe.  
Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East

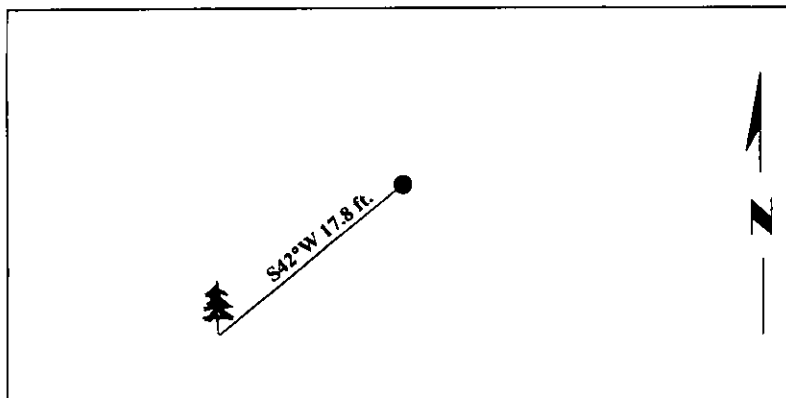

SKETCH OF CORNER

CERTIFICATION

I, Thomas M. Hommel  
certify the information shown herein to be true and correct.

I, Ronald A. Pearson  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.).

Signature of Surveyor & Seal

Date: 5/18/98

Reg. No.: 9008LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 8-3-98 and was noted on the cross-index plat and is assigned page No. 10136 in book No. \_\_\_\_\_.

Coral M. Cummings By DUB  
County Official

Sec. 33



• - corner this sheet