CERTIFIED CORNER RECORDATION

Corner MC Sec. 34 T. 33N R. 34W P.M., MT Lincoln County

I. 1903 G.L.O. Record by Allen B. Benedict: Left bank of Kootenai River on a limestone ledge, 20x16x3 ft. above ground, mkd. with a cross (x) at exact cor. point for meander cor. on S bdy. of sec. 34., mkd. "M.C." on East and "S.C." on North faces.

Established two bearing trees:


A fir, 9 ins. diam., bears N14°30'W, 60 lks. dist., mkd "T33N R34W S34 MC BT". A fir, 8 ins. diam., bears N30°30'W, 50 lks. dist., mkd "T33N R34W S34 MC BT".

II. No markings on ledge, they've eroded off.

from which:

A fallen rotten fir, with axe marks and scribe marks, bears N14°W, 39.6 ft. dist. A fir, 25 ins. diam., bears N30°W, 33.0 ft. dist., I bored into tree with a chainsaw and found original scribing.

III. In the position, as determined by the record bearing and distance, from the found bearing trees, cemented in a 3 1/4 in. diam. aluminum rock cap, flush in a ledge of rock, cap mkd. as shown.



Established two new bearing trees:


A fir, 7 ins. diam., bears $N05^{\circ}W$, 29.2 ft. dist., mkd. "X" on a snowblaze "BT".

A fir, 15 ins. diam., bears N19°W, 69.6 ft. dist., mkd. "T33N R34W S34 MC BT" 3

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs

gns ROI ALD PFARFO 19008L

Magnetic Declination: 20° East

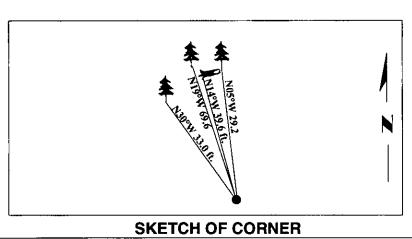

i, Rex O. Rice

certify the information shown herein is true and correct.

I, Ronald A. Pearson

certify that this Corner-Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor & Seal

Date: 5/28/98

Reg. No.: 9008LS

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for

record on / / / / / / and was noted on the in book No. ______.

cross-index plat and is assigned page No. 10

County Official

Sec. 34

Rootena River

- corner this sheet

Cross Index No.

MC S34

T. 33N

^{R.} 34W

Employer: U.S. FOREST SERVICE