

CERTIFIED CORNER RECORDATION

Corner: S-E S 36 Twp. 33 N., R. 34 W., P.M.M.
S-W S 31 Twp. 33 N., R. 33 W., P.M.M.

Lincoln County

Record :

Per GLO 1903 Allen Benidict

Set a granite stone 18X15X10 inch 12 inch in the ground for standard corner of Twp. 33 N., R. 33 and 34 W marked S.C. on N., with 6 grooves on N., E., and W faces raised a mound of stone 2 ft. base 1 1/2 ft high N, of Corner Pit impractical.

Found Evidence :

Original stone with mound of stone north of corner 2 ft at base 1 1/2 high.

Perpetuation :

Established the following two new bearing trees


From Which:

A 9 inch DBH Douglas Fir scribed Twp. 33N., R.34 W., S 36 BT bears N 27°W 25.2 ft distance.

A 11 inch DBH Douglas Fir scribed Twp. 33N., R.33 W., S31 BT bears N 33° 28 ft distance.

Painted six inch wide bands and attached warning and bearing tree signs to both trees.

Magnetic Declination 18 °E

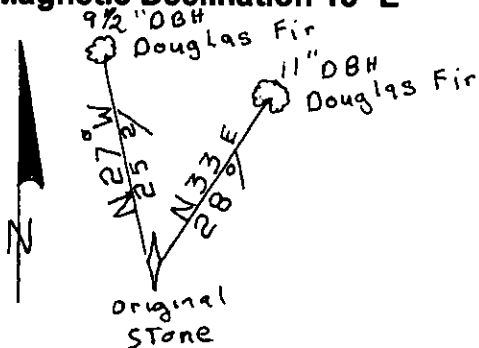

Sketch of Corner



Office of Clerk and Recorder, County of Lincoln.

This "corner record" was filed for record on Jan 3, 2001 10463
was noted on the cross-index plat and is assigned page No.

in book No. Local M. Warming By DB
County Official

Cross Index No. S-E S 36 Twp. 33 N., R. 34 W., P.M.M.
S-W S 31 Twp. 33 N., R. 33 W., P.M.M.

• THIS CORNER

CERTIFICATION

I, George Clark

certify the information shown herein is true and correct

Signature of Licensed Surveyor

I, KENNETH E. DAVIS
certify that this Corner Record correctly represents work performed
for or under my direction in compliance with the "Corner Records
Act"

(10-22-101, et seq., M.C.A.)
4975 S

Signature of Surveyor's Seal
Date: Jan 3, 2001 Reg. No. 4975-S

Employer: Davis Surveying, Inc.

Section

