

CERTIFIED CORNER RECORDATION

Corner: #6 HES 898 Twp. 33 N., R. 34 W., P.M.M.

Lincoln County

Per HES 898 field notes 1920

Record :

Place a small stone marked with a cross (X) under a slate stone 24 X16X6 inches, 14 inches in the ground, marked 6 HES 898 on SW face and cross (X) on top for the exact corner point.

From Which:

A cross (X) on a Red Fir tree 9 inches diameter Bears N 37° 42" E., 21 LKS distance.

A cross (X) on a Yellow Pine 14 inches diameter Bears S 37° 57" W., 51 LKS distance each blazed and scribed 1/ 256 6 HES 898 BT.

Raise a mound of earth 4 ft base 2 ft high SW of corner.

Found Evidence :

Original stone with mound of stones SW of corner and remains of original fir NE of corner scribing legible but fallen over.

Perpetuation :

Established two bearing trees for corner #6.


From which:

A 9 inch DBH Douglas Fir scribed 6 HES 898 BT Bears N 15 ° W 11 feet distance.

A 6 inch DBH Douglas Fir scribed X BT Bears S 47 ° E 3.7 feet distance.

Painted 6 inch Wide Bands and attached bearing tree signs to both trees.

Magnetic Declination 18 °E

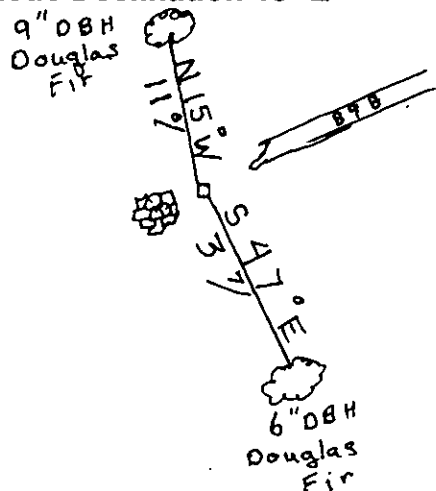

CERTIFICATION

I, George Clark

certify the information shown herein is true and correct

Signature of Ground Party Chief

I, George Clark, certify that this Corner Record correctly represents work performed by me under my direction in compliance with the "Corner Recordation

(KENDRICK & CO., INC.)

DAVIS

Signature of Surveyor

Plate: 4975.5

Employed by Davis Surveying, Inc.

Section

Sketch of Corner

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on 1-24-01

was noted on the cross-index plat and is assigned page No.

In book No.

County Official

10495

Coral M. Curran By RLB

Cross Index No. 6 HES 898 Twp. 33 N., R. 34 W., P.M.M.

• THIS CORNER

