

CERTIFIED CORNER RECORDATION

Corner: # 7 HES 898 Twp. 33 N., R.34 W., P.M.M.

Lincoln County

Per HES 898 field notes 1920

Record :

Place a small stone marked with a cross (X) under a slate stone 24X9X8 inches 14 inches in the ground, marked 7 HES 898 on SE face and a cross (X) on top for the exact corner point.

From Which:

A cross (X) on a Pine tree 6 inches diameter., Bears S1° 06'E 86 LKS distance.

A cross (X) on a Red Fir tree 6 inches diameter., Bears N 56° 43' W 45 LKS distance.

Each blazed and scribed 1/ 256 7 HES 898 BT.

Raised a mound of stone 4 feet base and 2 feet high SE of corner.

Found Evidence :

Original stone and mound of stones SE of corner.

Original 6 inch Fir NW of corner some scribing legible.

Perpetuation :

I used the original 6 inch Fir (now 20 inches DBH) for Bearing tree of corner #7.


From which:

A 20 inch DBH Douglas Fir scribed 7 HES 898 BT Bears N37° W 29.3 feet distance.

A 9 inch DBH Douglas Fir scribed 7 HES 898 BT Bears S57° W 9.6 feet distance.

Painted 6 inch Wide Bands and attached bearing tree signs to both trees

Magnetic Declination 18 °E

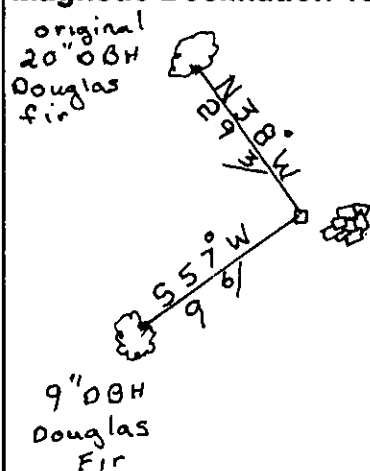

Sketch of Corner

Office of Clerk and Recorder, County of Lincoln.

This "corner record" was filed for record on 1-24-01

was noted on the cross-index plat and is assigned page No. 10496


in book No. Coral M. Cunningham By DB

County Official

Cross Index No. 7 HES 898 Twp. 33 N., R. 34 W., P.M.M.

• THIS CORNER

original



CERTIFICATION

I, George Clark

certify the information shown herein is true and correct

Signature of Ground Party Chief

I, Ken E Davis

certify that the information shown herein correctly represents work performed by Me or under my direction in compliance with the "Corner Recordation Act"

(70-22-10, et seq., M.C.A.)

Signature of Surveyor's Seal

Date 4-25-01 Reg. No. 4975

Employer Davis Surveying, Inc.

REGISTERED

AND SURVEYOR

Section

