# CERTIFIED CORNER RECORDITION

Corner: 14 HES 898 Twp. 33 N., R.34 W., P.M.M.

**Lincoln County** 

Per HES 898 field notes 1920

#### Record:

Place a small stone marked with a cross (X) under a Limestone 24 X 8X7 inches 14 inches in the ground marked 14 HES 898 on NW face and a cross (X) on top for the exact corner point.

### From Which:

A cross (X) on a Black Pine tree 7 inches diameter Bears S 33° 10' E., 20 LKS distance.

A cross (X) on a Balsam Fir tree 4 inches diameter Bears S 36° 03' W 33 LKS distance.

Each blazed and scribed 14 HES 898 BT.

Raised a mound of stone 4 feet base and 2 feet high NW of corner.

#### Found Evidence:

Original stone and mound of stones, original Black Pine Bearing Tree scribing still Legible on face.


## Perpetuation:

I used original Black Pine (Ponderosa Pine) now 15 inches DBH which Bears S 35° E, 12.8 feet distance from stone.

I established a 14 inches DBH Douglas Fir scribed 14 HES 898 BT which bears S 80° E 11.0 feet distance from stone.

I Painted 6 inch Wide Bands and attached bearing tree signs to both trees.

Magnetic Declination 18 °E

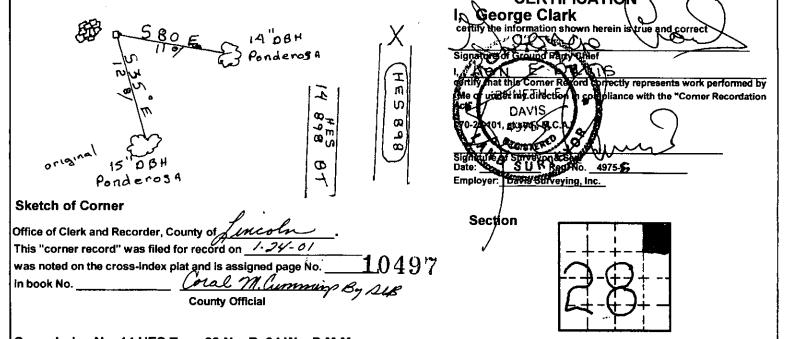

Cross Index No. 14 HES Twp. 33 N., R. 34 W., P.M.M.

THIS CORNER

**CERTIFICATIO**