

CERTIFIED CORNER RECORDATION

CORNER C-W-SE 1/64 T. 33 N., R. 34 W., P.M.M. LINCOLN COUNTY

RECORD:

NONE

FOUND EVIDENCE:

Spike set by USFS Per Contract No. AG-0343-C-07-0008

PERPETUATION:


Replaced spike with a 5/8 inch dia. rebar 30 inches long 28 inches in the ground with a 3 1/4 inch Aluminum Cap Stamped (see diagram below)
From Which

A 13 inch DBH Cedar scribed T33N R34W C-W-SE 1/64 S4 BT bears S74°W
25.65 ft. dist.

A 12 1/2 inch DBH Cedar scribed 1/64 S4 BT bears N10°E 3.95 ft. dist.

Painted 6 inch wide band and attached bearing tree tags and warning signs to trees

MAGNETIC DECLINATION: 18° E

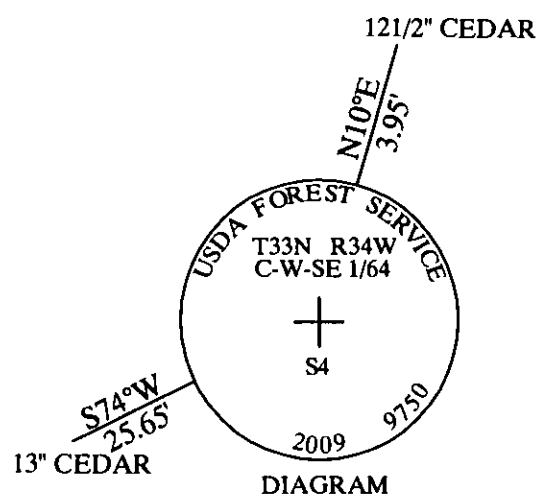


CERTIFICATION
I, George Clark
Certify the information shown herein is true and correct
Signature of Ground Party Chief
I, STEVEN A. BOYER
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation act" (70-22-001 et seq., M.C.A.)
Signature of Surveyor & Seal STEVEN A. BOYER
Date: 1/19/10 Reg. No. 9750
Employer: USDA FS

SKETCH OF CORNER

Office of Clerk and Recorder, County of _____
This "corner" was noted on 224317 BOOK: CCR CC&R'S PAGE: 11426 Pages: 1
No. _____ STATE OF MONTANA LINCOLN COUNTY
RECORDED: 02/04/2010 1:56 KOI: CC&R'S
In book No. TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: Debbie Lauer
TO: STEVE BOYER-SURVEYOR US FOREST SERVICE, Deputy

SECTION



THIS CORNER

Cross Index No. D-11.5 T. 33 N., R. 34 W., P.M.M.