CERTIFIED CORNER RECORDATION

C-S-NW 1/64 S4 T 33 N. R. 34 W. P.M.M. LINCOLN County

- No previous history.
- No evidence found.
- III. At the position determined by survey, set a 5/8 in. diam., 24 ins. long rebar, 23 ins. in the ground with a 3 1/4 in. diam. aluminum cap marked as shown.

C-S-NW 1/64 X S4 9750LS 2008


From which the new bearing trees:

A fir, 15 ins. diam, bears N63°E, 38.2 ft. dist., mkd. CSNW 1/64 S4 BT. A fir, 12 ins. diam, bears N34°W, 15.0 ft. dist., mkd. CSNW 1/64 S4 BT.

Painted red the scribed faces and 6 in. red bands around the bearing trees. Attached Land Survey Monument and Bearing Tree signs. Set a 6 ft. galvanized steel guard post 3 ft. South and West with Property Boundary and Land Survey Monument decals attached.

Date of Fieldwork: 7/14/2008 Survey crew: Steve Boyer, Tom Hommel Magnetic declination: 20° East assumed

Equipment used: Hand compass and loggers tape U.S. Forest Service, Supervisiors Office, 31374 Hwy. 2, Libby, MT 59923 (406) 293—6211

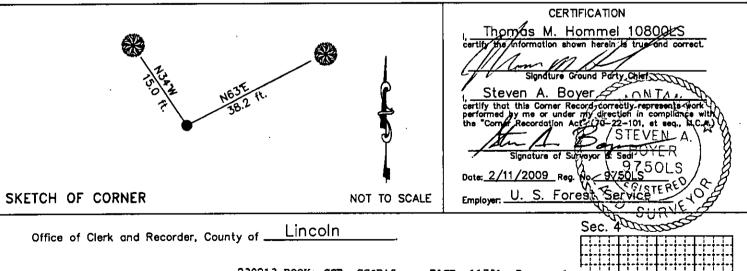

230213 BOOK: CCR CCGR'S PAGE: 11731 Pages: 1 STATE OF MONTANA LINCOLN COUNTY RECORDED: 12/14/2010 11:37 KOI: CCER'S TAMMY D. LAUER CLERK AND RECORDER FEE: \$0.00 TO: FILED , Cross Index No. <u>B.5-10</u> T. <u>33N. R. 34W.</u> Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors corner this sheet