CERTIFIED CORNER RECORDATION

Corner CWW 1/64 S4 T 33 N. R. 34 W. P.M.M. LINCOLN County

- I. No previous history.
- II. No evidence found.
- III. At the position determined by survey, set a 5/8 in. diam., 24 ins. long rebar, 23 ins. in the ground with a 3 1/4 in. diam. aluminum cap marked as shown.

T33N R34W CWW X 1/64 9750LS 2008

From which the new bearing trees:

A fir, 5 ins. diam, bears N50°W, 79.1 ft. dist., mkd. "X" BT. A fir, 8 ins. diam, bears N22°W, 39.8 ft. dist., mkd. CWW 1/64 S4 BT.


Painted red the scribed faces and 6 in. red bands around the bearing trees. Attached Land Survey Monument and Bearing Tree signs. Set a 6 ft. galvanized steel guard post 3 ft. North and West with Property Boundary and Land Survey Monument decals attached.

Date of Fieldwork: 7/15/2008

Survey crew: Steve Boyer, Tom Hommel Magnetic declination: 20° East assumed

Equipment used: Hand compass and loggers tape

U.S. Forest Service, Supervisiors Office, 31374 Hwy. 2, Libby, MT 59923 (406) 293-6211

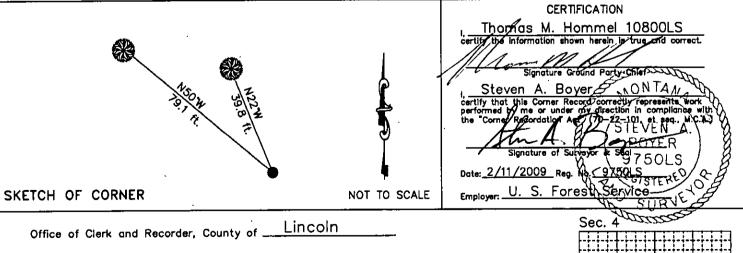

230218 BOOK: CCR CCGR'S PAGE: 11736 Pages: 1


STATE OF MONTANA LINCOLN COUNTY

RECORDED: 12/14/2010 11:45 KOI: CCER'S

TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00 BY

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors



ocorner this sheet