


CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)


ORIGINAL G.L.O..NOTES: CORNER NEVER SET

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

This corner was set from the section breakdown as indicated on the back. Set 1 1/2" X 30" iron pipe with 2" brass cap. Marked as shown.

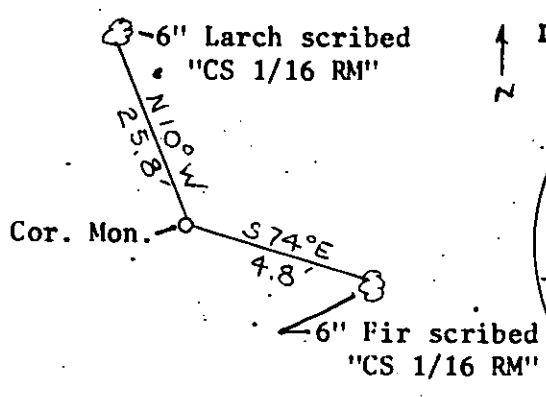

Date of work: Nov. 1979

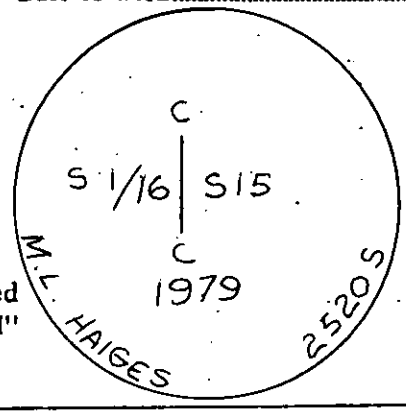

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

SEE BACK

Surveyor's Seal

I, JAMES BURTON  
certify that the information shown herein is true and correct.

*James Burton*  
Signature of Ground Party Chief

I, M. L. HAIGES  
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

*M. L. Haiges*  
Signature of Surveyor

DIAGRAM OF CORNER:  
T33N R34W

N.  
↑

CS 1/16  
SEC. 10

= Corner recorded on the sheet

2520S  
Registration Number

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 17th day of July 1980, was noted on the cross-index plat and is

assigned page No. 832, in book No.

*Eleonor L. Vaughn, Deputy Seal*  
County Official

# SECTION 15 BREAKDOWN

SCALE: 1" = 1000'

