1050

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

ORIGINAL G.L.O. NOTES: " Set a limestone, 15 x 12 x 8 ins., 10 ins. in the ground, for cor. of secs. 9, 10, 15 and 16, marked with 4 notches on S. and 3 notches on E. edges; from which
A pine, 50 ins. diam., bears N. 31° E., 37 lks. dist., marked T 33 N R34 W S 10 B T.
A pine, 34 ins. diam., bears S.39°50'E., 30 lks. dist., marked T 33 N R 34 W S 15 B T.
A pine, 20 ins. diam., bears S. 81° 45'W., 104 lks. dist., marked T 33 N R 34 W S 16 B T.
A pine, 18 lks. dist., bears N. 52° 30' W., 45 lks. dist., marked T 33 N R34 W S 9 B T."

FOUND: FOUND BRASS CAP MONUMENT SET BY THE B.L.M.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

ORIGINAL EVIDENCE FOUND NEW EVIDENCE FOUND

Date of work: OCT. 1979

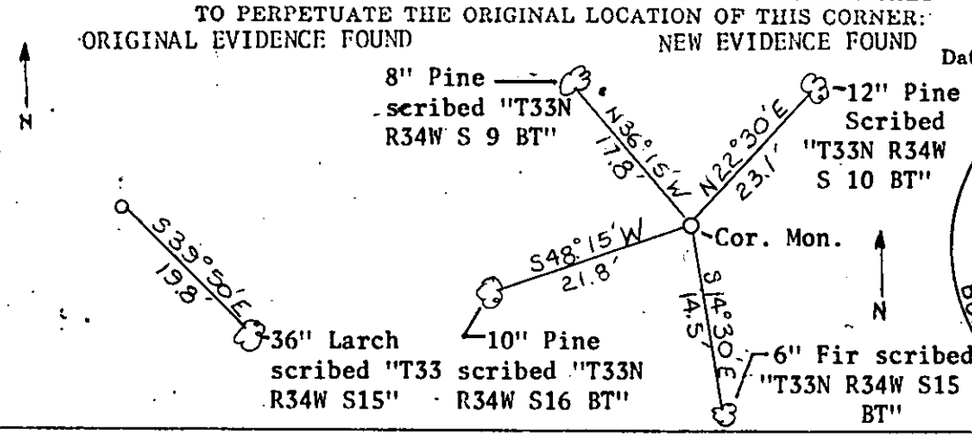

U.S. DEPT. OF INTERIOR UNLAWFUL TO DISTURB
T33N R34W
S 9 | S 10
S 16 | S 15
1970
BUR. OF LAND MANAGEMENT CADASTRAL SURVEY

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

SEE BACK

Surveyor's Seal

I, JAMES BURTON
certify that the information shown herein is true and correct.

James Burton
Signature of Ground Party Chief

I, M. L. HAIGES
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

M L Haiges
Signature of Surveyor

2520 S
Registration Number

DIAGRAM OF CORNER:

T33N R34W

N.

9 | 10
16 | 15

= Corner recorded on the sheet

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 17th day of July 1980, was noted on the cross-index plat and is assigned page No. 849, in book No.

Eleanor L. Vaughn, by Betty Bell, Deputy
County Official

Form 125 — 43227

Cross Index No. J13 T. 33 R. 34 Mer.

SECTION 10 BREAKDOWN

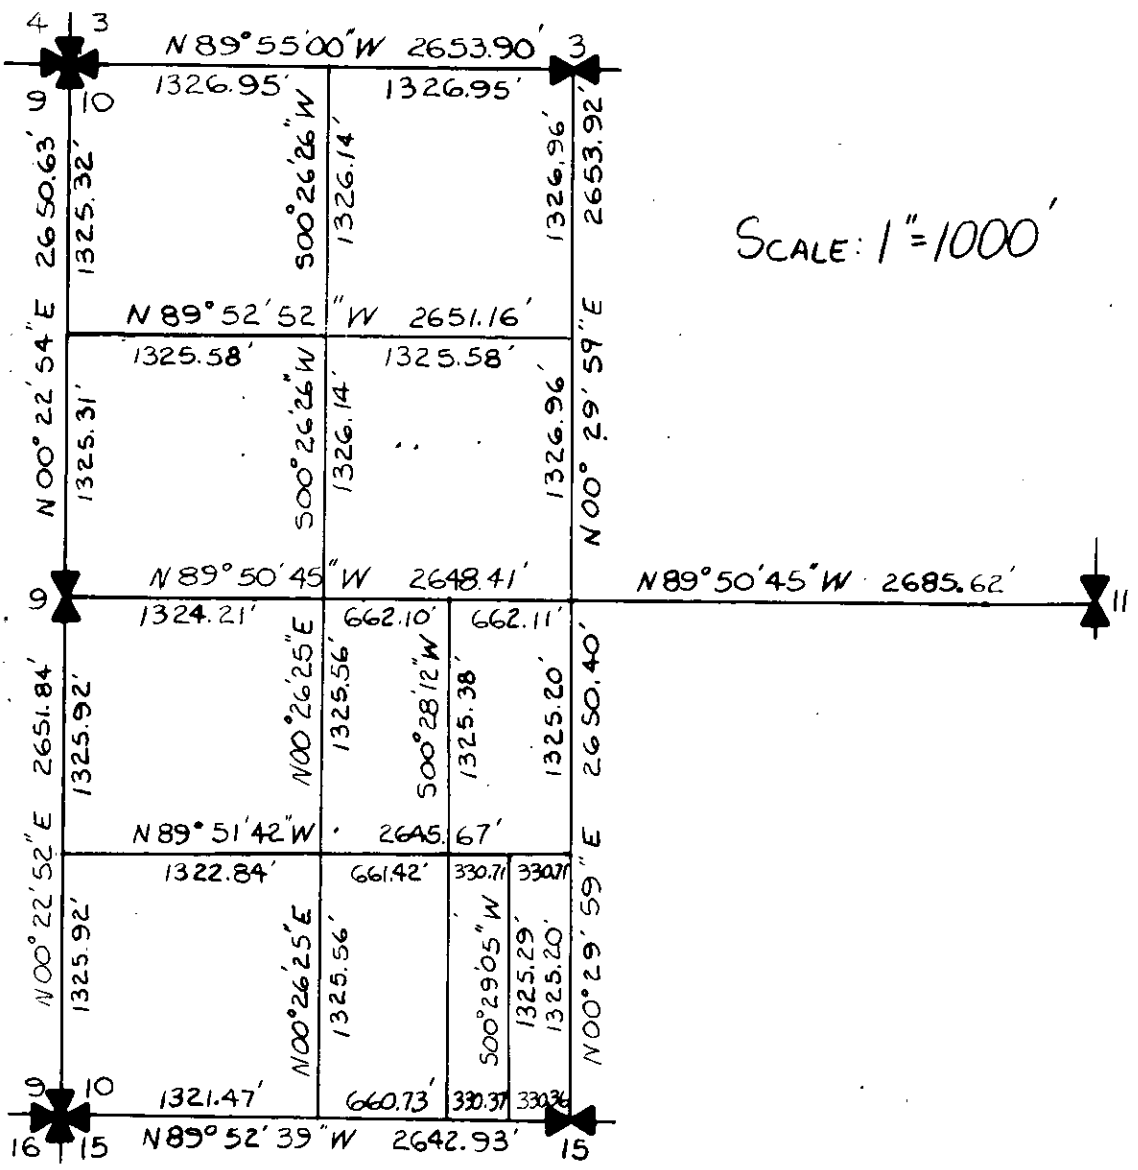

SCALE: 1" = 1000'