


CERTIFIED CORNER RECORDATION

Corner C-S-NW- SE 1/256 Sec. 17 T. 34N R. 25 W P.M., MT Lincoln County

- I. No previous history.
- II. No evidence found.
- III. At the corner position as determined by survey, set a 30 in. long, 3/4 in. diam. alum. rod, 27 ins. in the ground, with a 3 1/4 in. diam. alum. cap mkd. as shown:

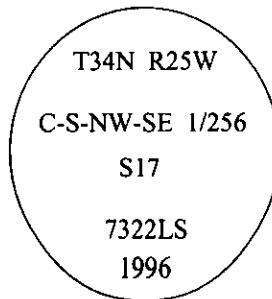


Established two bearing trees:

- A spruce, 9 ins. diam., bears S37°W, 16.9 ft. dist., scribed "X BT".
- A spruce, 14 ins. diam., bears S39°E, 36.7 ft. dist., scribed "C-S-NW-SE 1/256 S17 BT".

Set a 6 ft. steel guard post, West, 2.3 ft. dist., with Land Survey Monument and Property Boundary decals attached.

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East.

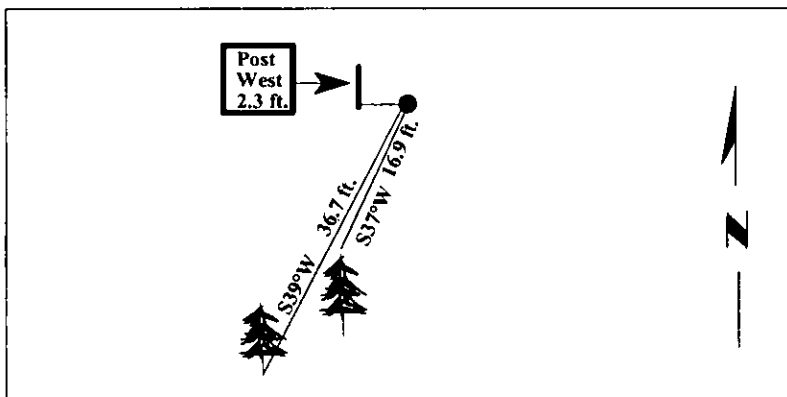

SKETCH OF CORNER

CERTIFICATION	
I, <u>Thomas M. Hommel</u> certify the information shown herein is true and correct.	
<i>[Signature]</i>	
I, <u>Alvah F. Hughes</u> certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)	
<i>[Signature]</i>	
Date:	<u>12/31/96</u>
Reg. No.:	<u>7322LS</u>
Employer:	<u>U.S. FOREST SERVICE</u>

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 11-18-98 and was noted on the cross-index plat and is assigned page No. 10260 in book No. _____

[Signature]
County Official

