

# CERTIFIED CORNER RECORDATION

Corner SE NW 1/64th Sec 6 T. 34N R. 25W P.M.M. Lincoln County

1. NONE

2. NONE

3. Set:

A Aluminum Cap, 3 1/4 ins. in diam., on 5/8 ins. diam. rebar 0.4 ft. above ground, mkd. as shown;

Established:


A Douglas Fir, 17 ins. in diam., bears N32°E, 8.1 ft. dist., scribed "SE NW 1/64 S6 BT";

A Douglas Fir, 12 ins. in diam., bears N39°W, 26.7 ft. dist., scribed "SE NW 1/64 S6 BT";

Steel posts with LSM decals bear South and West, 2.0 ft. dist.



MAGNETIC DECLINATION - 15°2' EAST

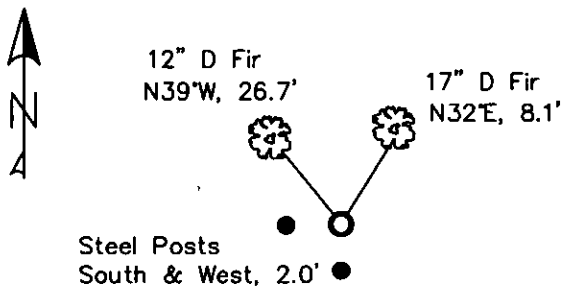

CERTIFICATION

I, Erich Shrack  
certify the information herein is true and correct.  
Lawrence A. Glahe  
I, Lawrence A. Glahe, a duly Licensed Professional Engineer,  
certify that this Corner Recordation was performed by me or under my direction in compliance with  
the "Corner Recordation Act" (MCA, Title 101, et seq.)  
Date: 12/6/10 9748 LS  
Employer: GLAHE & ASSOC., INC.


## SKETCH OF CORNER

Office of Clerk and Recorder, County of Lincoln. This "corner  
record" was filed for record on 230098 BOOK: CCR CC&R'S PAGE: 11697 Pages: 1  
was noted on the cross-index STATE OF MONTANA LINCOLN COUNTY  
book No. TAMMY D. LAUER CLERK AND RECORDER  
RECORDED: 12/09/2010 10:57 KOI: CC&R'S  
FEE: \$0.00 BY: Deanne D. Dwyer  
TO: GLAHE & ASSOC., INC. P.O. BOX 1863, SANDPOINT, ID. 83860

Cross Index No. C-3 T. 34N R. 25W PMM

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

Sec. 6



● corner this sheet

