CERTIFIED CORNER RECORDATION

Corner NW 1/16 Sec 6 T. 34N R. 25W P.M.M. Lincoln County

1. NONE

2. NONE

3. Set:
A Aluminum Cap, 3¼ ins. in diam., on 5/8 ins. diam. rebar, set flush with ground, mkd. as shown;

Established:
A Douglas Fir, 8 ins. in diam., bears S86°E, 55.8 ft. dist., scribed "NW 1/16 S6 BT";
A Ponderosa Pine, 19 ins. in diam., bears S32°E, 49.4 ft. dist., scribed "NW 1/16 S6 BT";
Steel posts with LSM decals bear South and East, 2.0 ft. dist.

USDA FOREST SERVICE
T34N R25W
NW 1/16
S6
LS 9748
2010
CADASTRAL SURVEY

MAGNETIC DECLINATION – 15°2' EAST

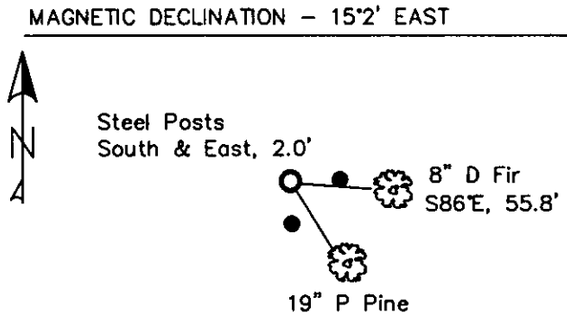

CERTIFICATION

I, Erich Shrack certify the information shown hereon is true and correct.

Registered Ground Party Chief

I, LAWRENCE A. GLAHE, LAWRENCE, hereby represents that work performed by me or under my direction is in compliance with the "Corner Recordation Act" (Title 22, Ch. 1401, et seq. M.C.A.)

9748 LS

Registered Land Surveyor

Date: 12-6-10 No. 9748 LS

Employer: GLAHE & ASSOCIATES

MONTANA LAWRENCE A. GLAHE 9748 LS REGISTERED LAND SURVEYOR

SKETCH OF CORNER

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record

230102 BOOK: CCR CC&R'S PAGE: 11701 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 12/09/2010 11:01 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: $0.00 BY: Deputy County
TO: GLAHE & ASSOC., INC. P.O. BOX 1863, SANDPOINT, ID. 83860,

was noted on the cross-book No. _____

Cross Index No. B-2 T. 34N R. 25W PMM

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

Sec. 6

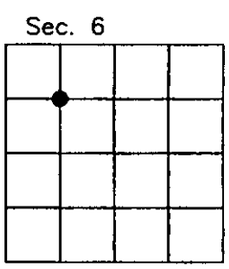
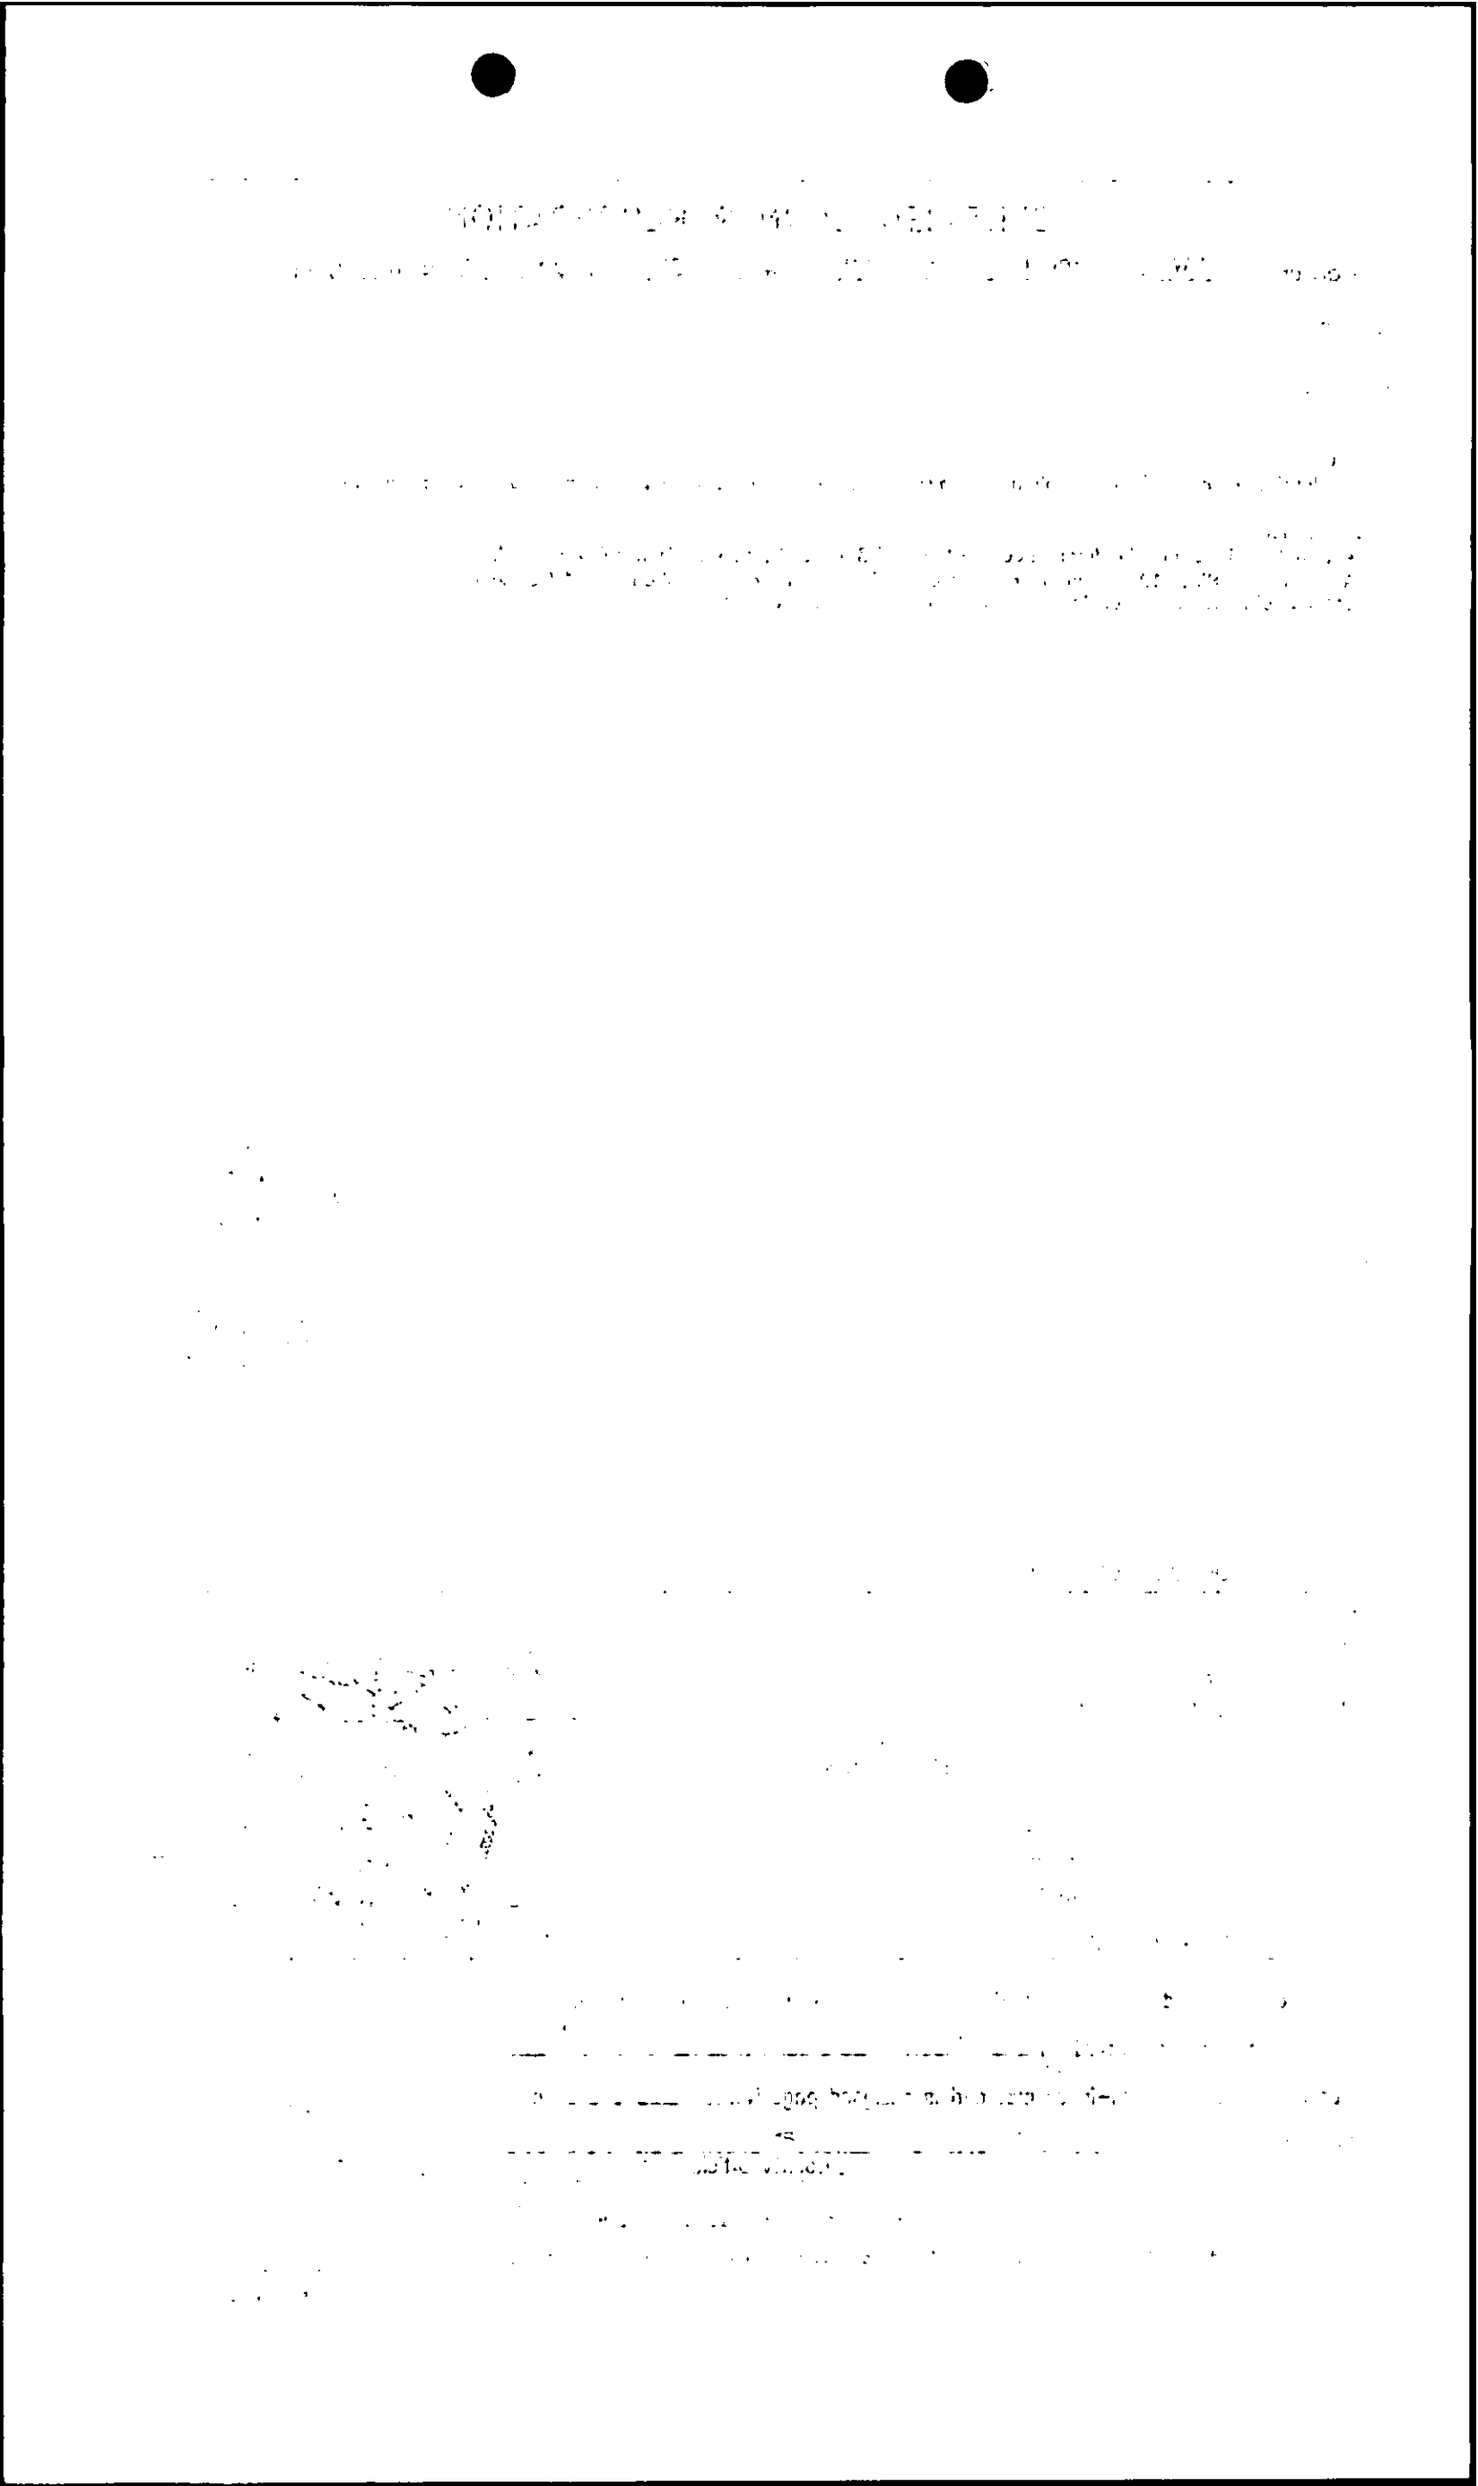
● corner this sheet