


INSTRUCTIONS

1. Original and/or subseq. record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Meander Corner Sections 9 & 16 T. 34N R. 23W P.M.M. Lincoln County

Found BLM brass cap

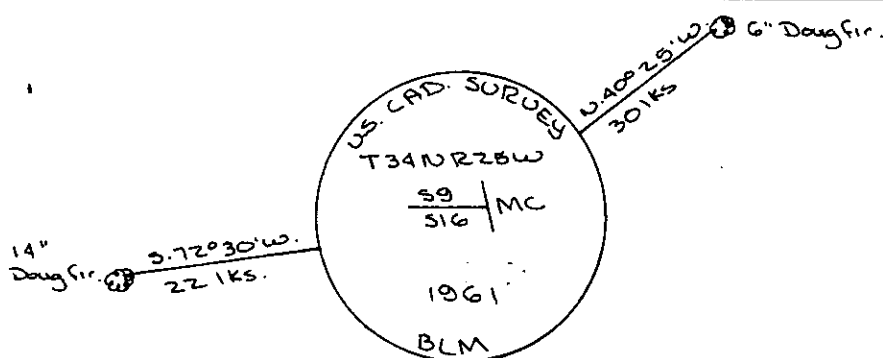

SKETCH OF CORNER

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, D.K. Marquardt
certify that this Corner Record correctly represents work performed
by me or under by direction in compliance with the "Corner
Recordation Act" (70-22-101, et seq., M.D.A.)

D.K. Marquardt
Signature of Surveyor & Seal

Date: 10/16/81 Reg. No. 3080ES


Employer: _____

Office of Clerk and Recorder, County of Lincoln. This "corner
record" was filed for record on the February 17th day of 1982
was noted on the cross-index plat and is assigned page No. 1528, in
book No. 1

Eleanor L. Vaughn by Betty L. Conner
County Official deputy

Cross Index No. J-11-12 T. 34N R. 23W P.M.M.

Sec. 16 MC



• - corner this sheet

RECEIVED
JAN 10 1964
U.S. DEPT. OF JUSTICE
FEDERAL BUREAU OF INVESTIGATION
WASHINGTON, D.C.